




IndigoVision

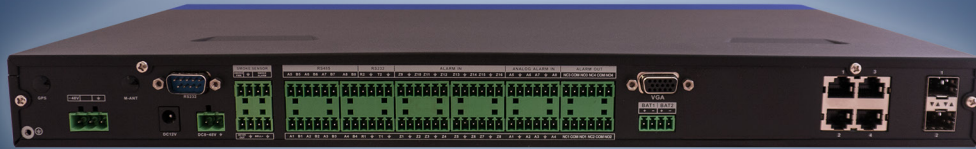

Alarm Panel

The simplest way to connect third party systems to IndigoVision

The IndigoVision BX120 Alarm Panel connects traditional binary seamlessly into Control Center. Connect up 16 binary inputs and 4 relay outputs with a single 19" rack mount BX120 Alarm Panel.

Positive and/or negative edge triggered inputs can generate events within Control Center to record video, display video from specific cameras, move cameras to preset PTZ positions, activate binary outputs etc. Outputs can be activated remotely over the IP network.

Key Features

OTHER



DNA

PHYSICAL



1U
Height



19"
Rack

Product Code


Alarm Panel

BX120 Alarm Panel with 16 Binary Inputs, 4 Binary Outputs

610120

Single Device Connection License required

Dimensions

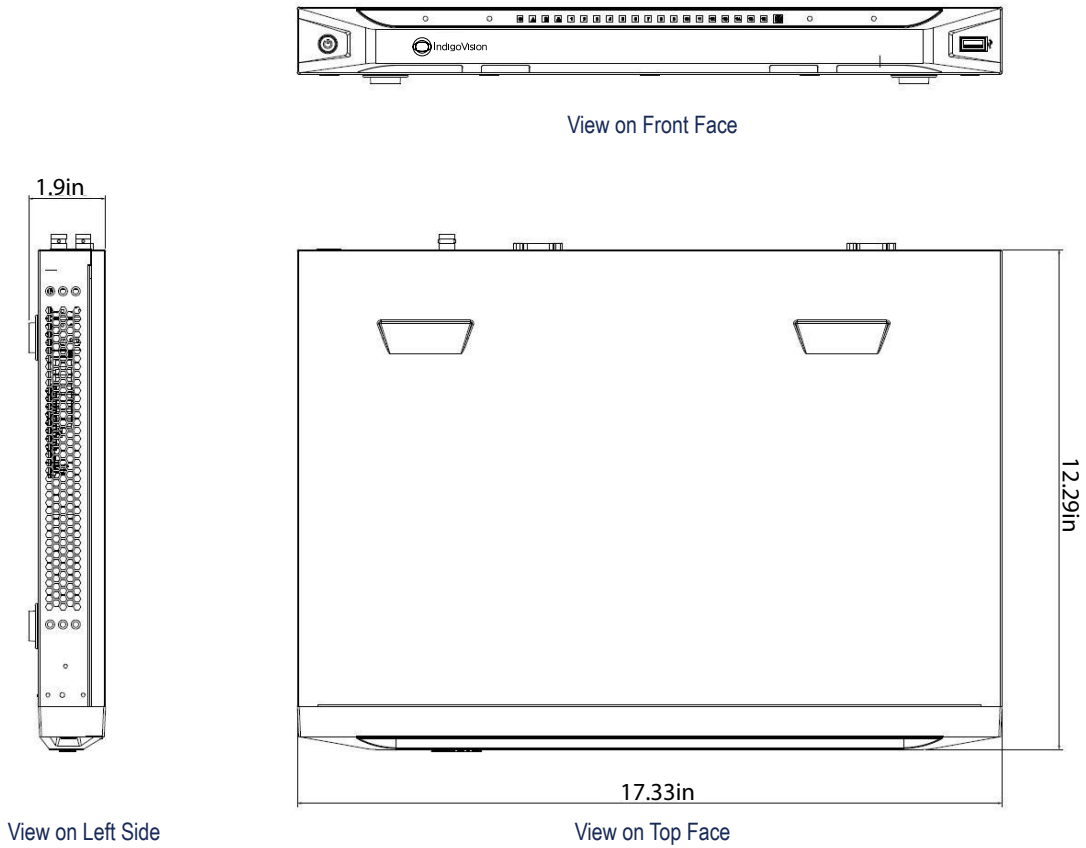

Specification

Operating Temperature	
Network Interface	Ethernet IEEE802.3 and IETF standards: 10/100 Base-T Ethernet, TCP, UDP, ICMP, IGMP, SNMP, HTTP; Embedded Linux firewall
Time	Embedded real-time clock, NTP client
Dimensions/Weight	12.29in (d) x 17.33in (w) x 1.9in(h) and 11.02lbs
Regulatory	EN50130-4 Emission standard Class A; EN61000-3-2 Mains Harmonics Class A; EN61000-3-3 Voltage Fluctuation; EN55024 ITE Immunity standard; CFR47: 2002 Part 15 Sub Part B (US federal code of regulations); UL60950
Electrical	Operating voltage: Input 1: 12V DC; Input 2 (wide voltage): 8-48V DC; Power consumption: 5W (typical) 30W (max);
Operating Temperature	-10°C to +60°C (+14°F to +140°F)
Control Center Licensed Features	
The availability of the following Alarm Panel features varies based on the Control Center software product the Alarm Panel is connected to*	
Binary Input/Output	16 Pull up inputs for non powered contacts; 4 relay outputs with Normally Open and Normally Closed contacts, Max 30.0V, 1.0A

*Requires either IndigoPro® or IndigoUltra® device connection license