

ABT-P20/PA / ABT-P20P/PA

SOUND PROJECTORS


- ✓ *Designed to achieve directional characteristic of sound emission*
- ✓ *20 W transformer with multiple branches ensuring accurate selection of output power*
- ✓ *Enclosed in an advance and functional cylindrical casing made of extruded aluminium*
- ✓ *Ideal for either ceiling or wall installation*
- ✓ *High sound quality in music and speech emission*



ABT-P20/PA



ABT-P20P/PA

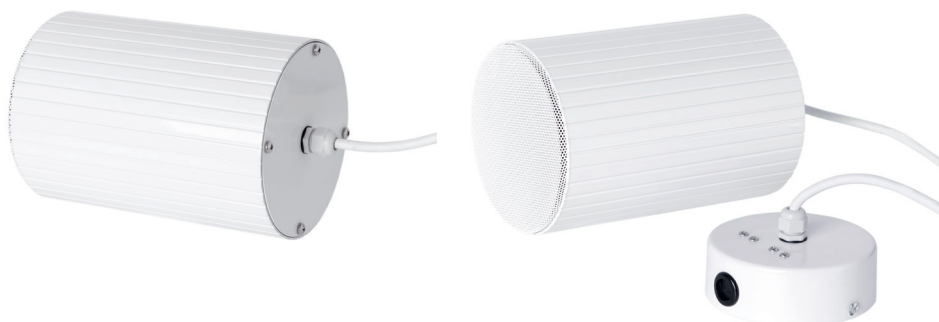

ABT-P20/PA / ABT-P20P/PA

Electrical

Rated power, W	20
Tappings 100 V, W	20 / 10 / 5 / 2,5
Tappings 70 V line, W	10 / 5 / 2,5 / 1,25
Effective frequency range, Hz	130–20000
SPL @ 1 m, 1 W, dB	91
SPL @ 1 m, rated power, dB	102
Dispersion at 500 Hz / 1 kHz / 2 kHz / 4 kHz, [°]	360 / 230 / 110 / 65


Environmental

IP rating	66
Min./max. ambient temperature	-25°C / 70°C

Mechanical

Dimensions, mm	Length 210, ø 143
Net weight, kg	2,4
Colour	White (RAL 9003)
Material	Aluminium
Mounting	Screw, U type bracket

Frequency band:

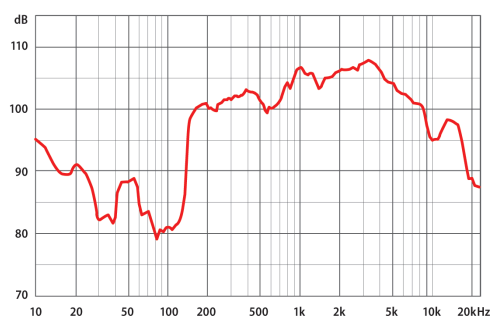

Circular chart of directional characteristic:

