


ABT-S186/PA


CEILING-MOUNTED LOUDSPEAKERS

- ✓ *The highest level of speech intelligibility*
- ✓ *Elegant design*
- ✓ *6 W transformer allowing a precise selection of loudspeaker output power*

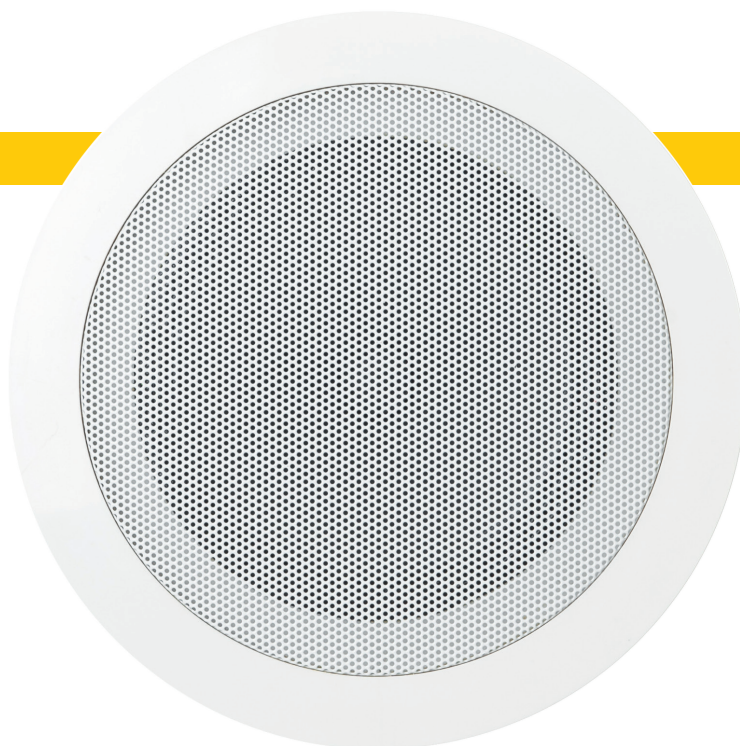

	ABT-S186/PA
Electrical	
Rated power, W	6
Tappings 100 V line, W	6 / 3 / 1,5 / 0,75
Tappings 70 V line, W	3 / 1,5 / 0,75 / 0,37
Effective frequency range, Hz	120 – 20 000
SPL @ 1 m, 1 W, dB	91
SPL @ 1 m, rated power, dB	99
Dispersion at 500 Hz / 1 kHz / 2 kHz / 4 kHz, [°]	180 / 180 / 150 / 90
Environmental	
IP rating	32C
Min./max. ambient temperature	-10°C / 55°C
Mechanical	
Dimensions, mm	Height 75, ø 175
Net weight, kg	0,66
Colour	White (RAL 9003)
Material	ABS
Mounting	Spring clamp
Cut-out, mm	ø 150

Frequency band:

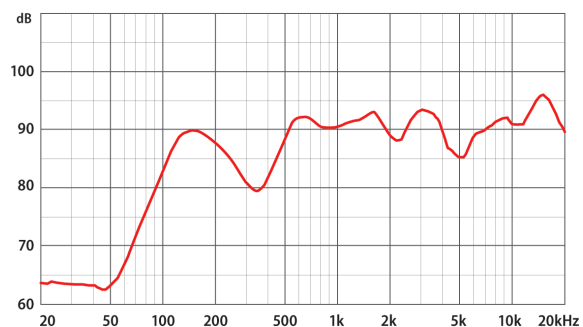

Circular chart of directional characteristic:

