


# ABT-S206B/PA


## CEILING-MOUNTED LOUSPEAKERS

- ✓ *The highest level of speech intelligibility*
- ✓ *Elegant design*
- ✓ *6 W transformer allowing a precise selection of loudspeaker output power*
- ✓ *100% protection of line from breaks and short-circuits*

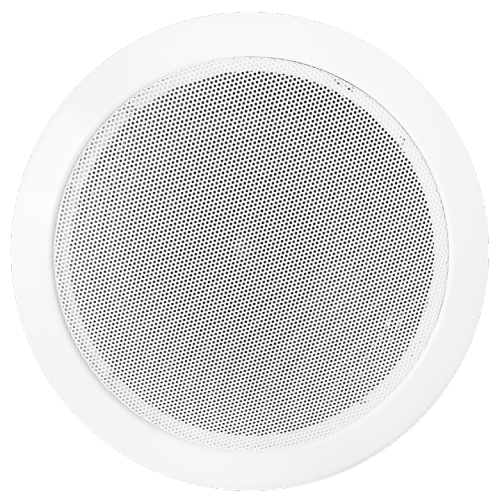

|                                                   | ABT-S206B/PA                        |
|---------------------------------------------------|-------------------------------------|
| <b>Electrical</b>                                 |                                     |
| Rated power, W                                    | 6                                   |
| Tappings 100 V line, W                            | 6 / 3 / 1,5 / 0,75                  |
| Tappings 70 V line, W                             | 3 / 1,5 / 0,75 / 0,37               |
| Effective frequency range, Hz                     | 120 – 20 000                        |
| SPL @ 1 m, 1 W, dB                                | 93                                  |
| SPL @ 1 m, rated power, dB                        | 101                                 |
| Dispersion at 500 Hz / 1 kHz / 2 kHz / 4 kHz, [°] | 180 / 180 / 95 / 70                 |
| <b>Environmental</b>                              |                                     |
| IP rating                                         | 32C                                 |
| Min./max. ambient temperature                     | -10°C / 55°C                        |
| <b>Mechanical</b>                                 |                                     |
| Dimensions, mm                                    | Height 115, ø 199                   |
| Net weight, kg                                    | 1,13                                |
| Colour                                            | White (RAL 9003) / Black (RAL 9011) |
| Material                                          | Steel                               |
| Mounting                                          | Spring clamp                        |
| Cut-out, mm                                       | ø 175                               |

Frequency band:

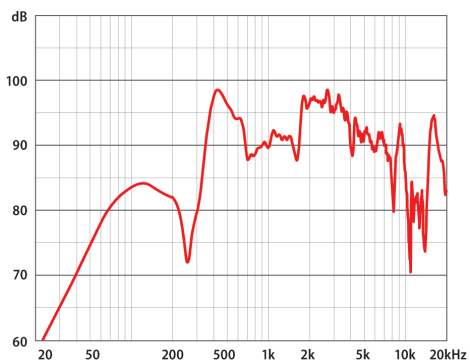

Circular chart of directional characteristic:

