


DS-D5086UL 86" 4K Monitor



Key Features

- I Industrial grade A+ LCD panel
- I Designed for surveillance, high reliability and stability
- I Abundant varieties of interfaces: BNC, VGA, digital interface and diversified interfaces
- I 4K resolution is 4 times 1080P can own broader view and more abundant details
- I 16.7 million color, display picture perfectly
- I Support horizontal and vertical display
- I Horizontal 178°, Vertical 178°
- I Dedicated project RS232 interface
- I Build-in loudspeaker, audio visual connection
- I VESA standard
- I Metal shell

Interfaces



NO.	Description
1	VGA IN
2	HDMI IN
3	DVI IN
4	AUDIO IN/OUT
5	CVBS IN/OUT
6	USB Interface
7	RS-232 IN

Model

DS-D5086UL




Specifications


Model	DS-D5086UL			
Backlight	LED Backlight			
Screen Size	86"			
Pixel Pitch	0.4935 mm * 0.4935 mm			
Max Resolution	3840 × 2160			
Brightness	410 cd/m ² (Typical)			
Contrast	1200 : 1			
Response Time	8 ms			
Color	10 bit, 1.07B			
Active Area	1895.04 × 1065.96 mm			
Viewing Angle	Horizontal 178°, Vertical 178°			
Interfaces	HDMI input	2	Audio input	1
	VGA input	1	Audio output	1
	DVI input	1	USB interface	1
	CVBS(BNC) input	1	Network	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface
	CVBS(BNC) output	1	RS-232 interface	1
Power Supply	AC 100~240V, 50/60 Hz			
Power Consumption	≤ 100W			
Standby Power Consumption	< 1 W(Standby)			
Loudspeaker	5W x 2			
Working Temperature	0 °C ~ 40 °C(32°F ~ 104°F)			
Working Humidity	10% ~ 90% (No Condensation)			
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)			
Storage Humidity	5%~90% (No Condensation)			
Color of Casing	Black			
VESA	4-M6 200 mm * 300 mm			
Dimensions(W*H*D)	1975.6 mm(W)*1157 mm(H)*94.5 mm(D)			
Packing Dimensions(W*H*D)	2210 mm * 1490 mm * 355 mm			
Gross Weight	95 kg			
Net Weight	75 kg			
Accessories	Power cord	1		
	User manual	1		
	Warranty card	1		
	Remote control	1		
	CD	1		
	Battery	2		
Bracket	Pedestal	NA		
	Wall mounted	Optional DS-DM6586W		
*Note	All specifications mentioned above are subject to the actual product			



Dimensions (unit: mm)

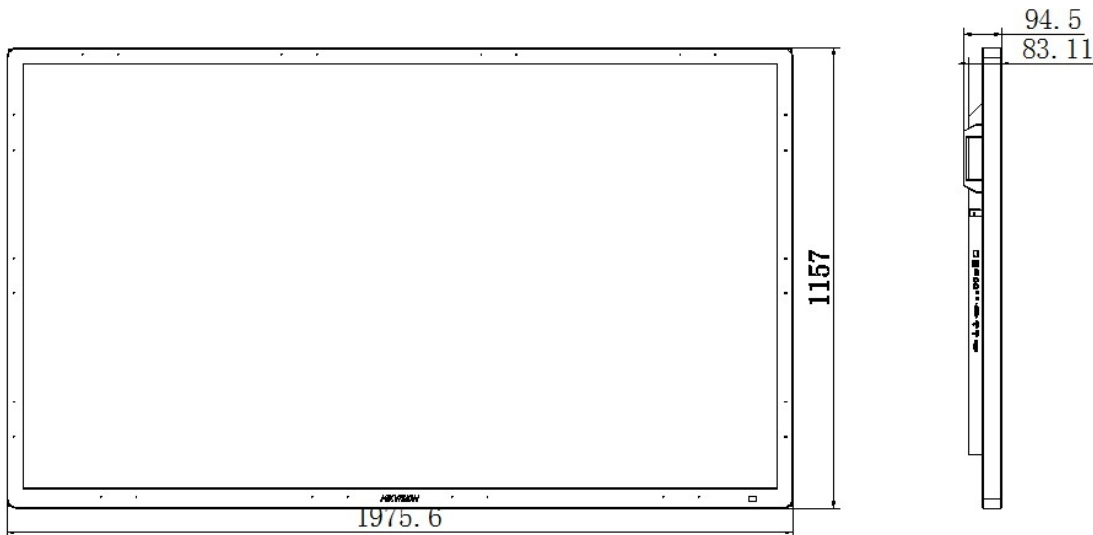

Distributed by

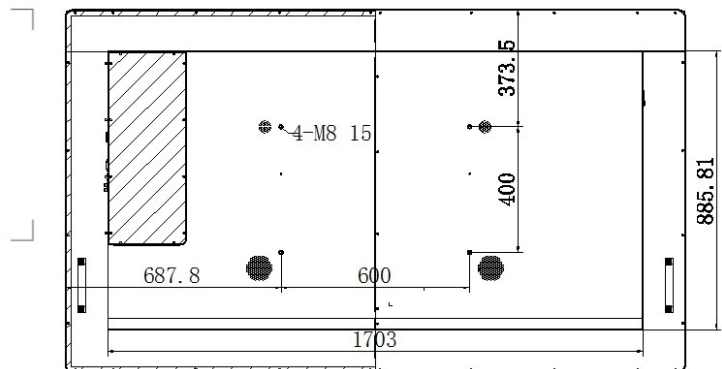

Headquarters
 No.555 Qianmo Road, Binjiang District,
 Hangzhou 310051, China
 T +86-571-8807-5998
 overseasbusiness@hikvision.com

Hikvision USA
 T +1-909-895-0400
 sales.usa@hikvision.com

Hikvision Europe
 T +31-23-55-42-770
 info.eu@hikvision.com

Hikvision Middle East
 T +971-4-8816086
 salesme@hikvision.com

Hikvision Russia
 T +7-495-669-67-99
 saleru@hikvision.com

Hikvision India
 T +91-22-28469900
 sales@pramahikvision.com

Hikvision Italy
 T +39-0438-6902
 info.it@hikvision.com

Hikvision France
 T +33(0)1-85-330-450
 info.fr@hikvision.com

Hikvision Spain
 T +34-91-737-16-55
 info.es@hikvision.com

Hikvision Poland
 T +48-22-460-01-50
 poland@hikvision.com

Hikvision UK
 T +01628-902140
 support.uk@hikvision.com

Hikvision Singapore
 T +65-6684-4718
 sg@hikvision.com

Hikvision Oceania
 T +61-2-8599-4233
 salesau@hikvision.com

Hikvision Canada
 T +1-909-895-0400
 sales.usa@hikvision.com

Hikvision Korea
 T +82-31-731-8841
 sales.korea@hikvision.com

Hikvision Brazil
 T +55 11 3318-0050
 Latam.support@hikvision.com

Hikvision Africa
 T +27 (10) 0351172
 sale.africa@hikvision.com

Hikvision Hong Kong
 T +852-2151-1761