


**CA2200A****2/4/8/16-BUTTON CIAO MODULE. S2**

Ciao series button module for Simplebus 2 system. Front panel in technopolymer, resistant to atmospheric agents (IP54 protection rating and paint with anti-UV treatment) and acts of vandalism (IK08 protection rating). To be finished with 2/4/8/16 call buttons (art. CA9210, CA9211, CA9212 and 2 x CA9212 respectively), available to purchase separately. Supplied with a surface mounting bracket. Can be installed alongside (horizontally or vertically) up to 4 button modules. For use in conjunction with art. CA2100A.

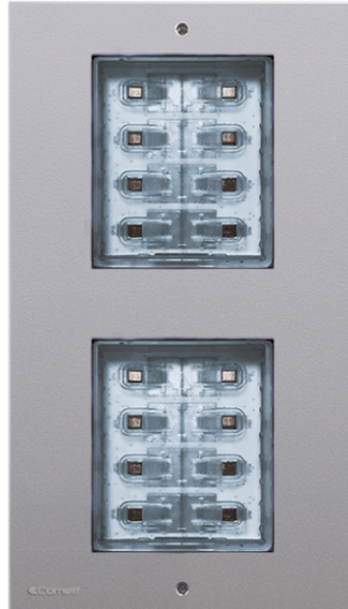

CA2200A

2/4/8/16-BUTTON CIAO MODULE. S2

COMPATIBLE SYSTEMS

Audio Simplebus 2 with power supply art. 1210/1210A	Yes
---	-----

ELECTRICAL CHARACTERISTICS

Type of power supply	Power supply from video door entry bus
Maximum absorption (W)	0.62

HARDWARE FEATURES

Number of push-buttons (n°)	16
-----------------------------	----

SETTINGS

Backlight brightness	Yes
----------------------	-----

ENVIRONMENTAL AND COMPLIANCE FEATURES

Operating humidity (RH max) (%)	25 ÷ 95
Environmental class	IV

GENERAL FEATURES

Backlight colour	White
Call type	Push-buttons
CE certifications	RoHS II - 2011/65/UE (EN IEC 63000:2018), EMC 2014/30/UE (EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011)
IP protection rating	IP54
Type of buttons	Mechanical

MAIN FEATURES

Vandal Resistant rating (IK code)	IK08
Height (mm)	172
Width (mm)	100
Depth (mm)	28
Product weight (g)	250



CA2200A

2/4/8/16-BUTTON CIAO MODULE. S2

MAIN FEATURES

Operating temperature (°C)	-25 ÷ 55
Supply voltage	33VDC

GENERAL DATA

Type of finishing materials	Technopolymer
Product color	Grey RAL 9006

MOUNTING/INSTALLATION

Wall-mounted	Yes
--------------	-----