

ABT-P20/ABT-P20P

EN 54-24

SOUND PROJECTORS

- ✓ *Compliance with EN 54-24*
- ✓ *Certificate of Conformity: 1438-CPR-0702*
- ✓ *Compliance with BS5839-8 standard (thermal protection)*



Fire alarm ABT-P20, ABT-P20P loudspeakers have been designed and manufactured for the most demanding customers as well as to meet the requirements of the most complex and sophisticated sound transmitting applications. Thanks to the contribution of advanced technologies they combine excellent acoustic parameters and high aesthetics with resistance to mechanical damages and varying weather conditions as well as low prices. Their additional quality is an exceptionally quick and simple installation.

Quality standards and audio characteristics have been confirmed through tests and trials in an anechoic chamber, resistance and integrity testing equipment, as well as chambers for resistance to weather and air humidity testing. The need to maintain the best acoustic parameters was the idea underlying the design process.

ABT-P loudspeaker models emitting the sound which features directional characteristic and high efficiency. 5-inch 2-cone wide band loudspeakers used in these series are excellent alternative solution for horn-type units due to wide frequency band. They prove excellent in both musical and verbal applications. ABT-P20 and ABT-P20P loudspeakers are enclosed in round casings made of extruded aluminium; they feature a high class of protection from humidity. Thanks to directional characteristic of sound propagation our loudspeakers are mostly applied on circulation routes and in wide area sound emission. Due to resistance to weather conditions the loudspeakers prove excellent in industrial halls, warehouses,

as well as partly open spaces exposed to outdoor weather conditions.

Apart from high mechanical and functional resistance ABT-P loudspeakers entirely comply with global requirements for systems, including also the British Standard No. BS5839 Part 8 and EN 54-24.

Technical solutions applied in the design ensure continuous operations of sound-transmitting line connected with the loudspeaker even in the case the latter is damaged or burnt as a result of fire. The said protection is composed of ceramic blocks installed inside the loudspeaker, internal fireproof wiring, and temperature limit fuse. Two sound-transmission cable penetrations in the casing are insulated by means of two cable glands. Inside the fire zone the loudspeaker is isolated from the entire line, which ensures line continuity and uninterrupted broadcasting of emergency messages. The individual power rating is selected by means of connection with applicable transformer branch.

ABT-P loudspeakers are designed for continuous operations at rated parameters for at least 100 hours in compliance with the IEC-268-5 Standard.

ABT-P20P loudspeakers are designed for pendant mounting. They are equipped with an additional junction box enabling simple and quick speaker installation. They are used wherever the distance from ceiling mounted speaker is too large.

CHARACTERISTICS


- » *Designed to achieve directional characteristic of sound emission*
- » *20 W transformer with multiple branches ensuring accurate selection of output power*
- » *Enclosed in an advance and functional cylindrical casing made of extruded aluminium*
- » *Ideal for either ceiling or wall installation*
- » *Fireproof casing with ceramic block and thermal fuse*
- » *High sound quality in music and speech emission*



	ABT-P20	ABT-P20P
Electrical		
Rated power, W	20	
Tappings 100 V line according to EN 54-24, W	20 / 10 / 5 / 2,5	
Tappings 70V line, W	10 / 5 / 2,5 / 1,25	
Transformer impedance @ 100 V, Ω	500 / 1000 / 2000 / 4000	
Driver impedance, Ω	8	
Effective frequency range, Hz	130–20000	
Sensitivity @ 4 m, 1 W, dB	79	
SPL @ 4 m, rated power, dB	90	
SPL @ 1 m, 1 W, dB, test signal bandwidth 300Hz–6 kHz	91	
SPL @ 1 m, rated power, dB, test signal bandwidth 300Hz–6 kHz	102	
Dispersion at 500 Hz / 1 kHz / 2 kHz / 4 kHz, [°]	360 / 230 / 110 / 65	
Environmental		
Environmental type / IP rating according to EN 54-24	B / IP33C	
IP rating*	66	
Min./max. ambient temperature	-25°C / 70°C	
Mechanical		
Dimensions, mm	Length 210, ø 143	
Net weight, kg	2,4	2,8
Colour	White (RAL 9003)	
Material	Aluminium	
Mounting	Screw, U type bracket	Screw, pendant
Option		
For DC line monitoring	Capacitor (ABT-P20C / ABT-P20PC)	
Colour optional	RAL palette	
Model Ease	✓	

* not confirmed by CNBOP-PIB

Frequency band:

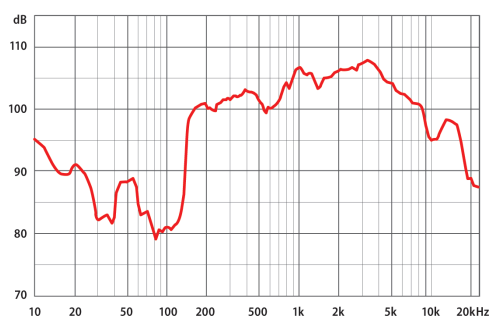

Circular chart of directional characteristic:

