

WMC

WALL-MOUNTED CONTROLLER

- ✓ *Intuitive and easy operation*
- ✓ *Touch-screen display*
- ✓ *Bluetooth 5.0*
- ✓ *XLR input with 9V Phantom power*



NEW!

For intuitive and easier operation, WMC has been equipped with a touch-screen display. Navigation in the menu and change of settings is possible by means of both control buttons located next to LCD display, and touch-screen display.

Wall mounted controller is equipped with Bluetooth audio module which provides wireless audio connection for up to 40 meters between WMC and other Bluetooth source like


mobile phone. WMC has 2 local audio inputs on board and 1 audio output which allows for further system extension. Communication with control units takes place via Ethernet 10/100BASE -TX, 1 LAN port. The WMC controller, via a touchscreen colour display, allows convenient and quick selection of the audio source, volume control of audio inputs and sending to selected zones in the system.

CHARACTERISTICS

- » *4,3" LCD touch screen for fast and clear matricing and volume change*
- » *Non-symmetrical audio input, (1/8") stereo jack connector*
- » *Stereo jack socets for Headset / Audio out*
- » *Power supply via POE or locally 48 VDC*



WMC BOX W

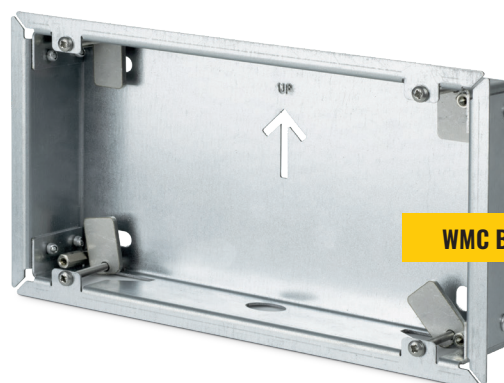

WMC BOX F

	WMC
Power supply	via PoE (RJ45) or by additional input power supply 48V / 15W DC connector 5,5 / 2,1 mm
LCD	LCD, 272 × 480 resolution, 4.3" resistive touchscreen
Number of audio outputs	1 channel audio (headset)
Number of audio inputs	3 channels (Bluetooth, 3,5mm jack, XLR)
Bluetooth audio connection	Bluetooth 5.0, PIN code Bluetooth security, up to 40 meters connectivity
Network	Single 100 Mbit/s
Audio Inputs	
Input type	single-ended, 3 × bgm
Frequency response	50 Hz ... 18 kHz (@3dB)
ADC resolution	32 bit
Sampling frequency	48 kHz
Connector	1 × mini-jack 3,5 mm; 1 × XLR
Microphone input	
Input, connection type	balanced inputs, XLR
Environmental	
Degree of protection	IP 30
Operating temperature	-5°C to 40°C
Operating humidity	15% to 80%
Storage temperature	-20°C to 70°C
Storage humidity	5% do 95%
Mechanical	
Dimensions	194 (W) × 108 (H) × 50 (D) mm
Weight	1,4 kg
Accessories	
Housing	WMC BOX W-m wall-mounted housing, WMC BOX F-m flush mounted housing