


Specification: **BR-1013**

- * 3/8" diameter press to fit
- * Standard 18" #22 AWG leads
- * Special leads upon request
- * Switch or magnet are available separately
- * Resistor, Diode and Supervisory Loop available on request
- * Build-in Resistors or Diodes on quest
- * Colors: White, Brown, Grey

... Recessed Mounted



Dimension (mm):

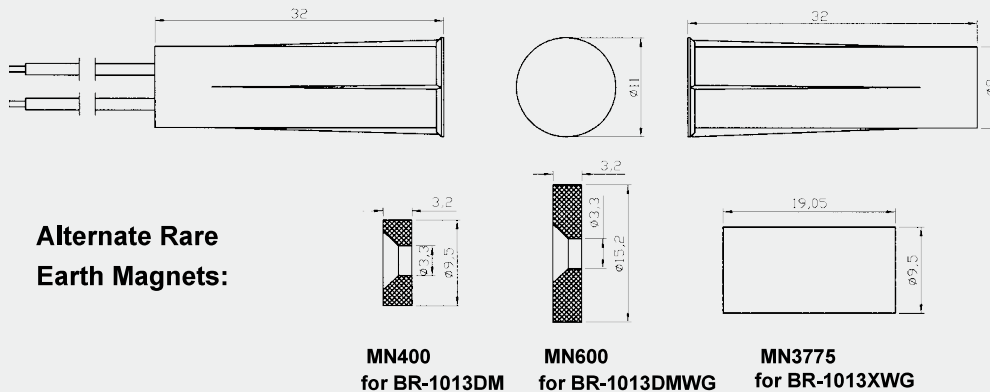

Order Information:

| Part Number | Loop Type | Reed Form | Closed Gap [Inch(mm)] | Depature Gap [Inch(mm)] (Ohm) | Maximum Initial Contact Resistance (W) | Maximum Contact Rating (VDC/VAC) | Maximum Switching Voltage (A) | Maximum Switching Current |
|--------------|-------------|-----------|------------------------------------|-------------------------------|--|----------------------------------|-------------------------------|---------------------------|
| BR-1013 | Closed | N/O | 1 (25) | 1.1 (28) | 0.150 | 10 | 100 | 0.5 |
| BR-1013XWG | Closed | N/O | 1 ¹ / ₄ (37) | 1.81 (46) | 0.150 | 10 | 100 | 0.5 |
| BR-1013DM | Closed | N/O | ³ / ₄ (19) | 0.87 (22) | 0.150 | 10 | 100 | 0.5 |
| BR-1013DMWG | Closed | N/O | 1 ¹ / ₄ (31) | 1.3 (33) | 0.150 | 10 | 100 | 0.5 |
| BR-1013A | Open | N/C | ¹ / ₈ (22) | | 0.150 | 3 | 30 | 0.2 |
| BR-1013C | Closed&Open | SPDT | ¹ / ₈ (22) | | 0.150 | 3 | 30 | 0.2 |
| BR-1013DMA | Open | N/C | ⁵ / ₈ (15) | | 0.150 | 3 | 30 | 0.2 |
| BR-1013DMC | Closed&Open | SPDT | ⁵ / ₈ (15) | | 0.150 | 3 | 30 | 0.2 |
| BR-1013DMWGA | Open | N/C | 1 (25) | | 0.150 | 3 | 30 | 0.2 |
| BR-1013DMWGC | Closed&Open | SPDT | 1 (25) | | 0.150 | 3 | 30 | 0.2 |

* BR-1013XWG magnetic contact switches shall be installed so that a door or other movable opening cannot be opened more than 2 inches (51mm) without initiating an alarm. Switches exceeding 2 inches can not be installed per UL681-the Standard for installation and Classification of Burglar and Holdup Alarm