


DS-2CE56C2P(N)-IT3

720 TVL PICADIS EXIR Dome Camera




EXIR

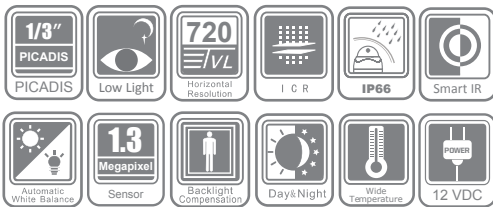

Key features

- 1/3" PICADIS
- 1.3MP Sensor: 1280 (H) x 960 (V) Effective Pixels
- True Day/Night
- 720 TVL Horizontal Resolution
- 40m IR Distance
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

Dimensions

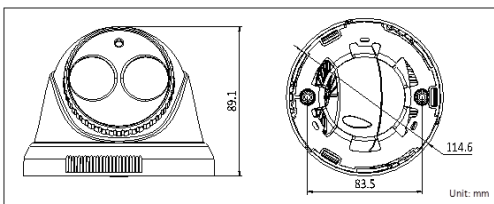

Accessories



DS-1258ZJ
(Wall Mount)

| DS-2CE56C2P(N)-IT3 | |
|----------------------------------|---|
| Camera | |
| Image Sensor | 1/3" PICADIS |
| Signal System | PAL/NTSC |
| Effective Pixels | 1280 (H) x 960 (V) |
| Min. Illumination | 0.1 Lux @ (F1.2,AGC ON),0 Lux with IR |
| Shutter speed | PAL: 1/25 s to 1/25,000 s NTSC: 1/30 s to 1/30,000 s |
| Lens | 3.6mm (2.8mm,6mm,8mm,12mm,16mm optional) Angle of view: 71.4° (3.6 mm) |
| Lens Mount | M12 |
| Angle Adjustment | Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360° |
| Day & Night | IR cut filter with auto switch |
| Horizontal Resolution | 720 TVL |
| Synchronization | Internal synchronization |
| Video Output | 1Vp-p composite output (75 Ω/BNC) |
| S/N Ratio | More than 62 dB |
| BLC | On |
| General | |
| Working Temperature/ Humidity | -40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing) |
| Power Supply | 12 V DC |
| Power Consumption | Max. 5 W |
| Ingress Protection | IP66 |
| IR Range | 40 meters |
| Dimensions | Φ 114.6x 89.1mm(Φ 4.5"x3.5") |
| Weight | 300 g (0.66 lbs) |

Available models

PAL: DS-2CE56C2P-IT3
NTSC: DS-2CE56C2N-IT3