

## DS-KIS603-P(C) IP Video Intercom Kit



- IP video intercom for villa or house
- One call button for easier calls
- Convenient Hik-Connect APP Mobile Control
- Including: DS-KV6113-WPE1(C) x1, DS-KH6320-WTE1 x1, DSKABV6113-RS × 1, Administrator card x1, Key fob x 5, PSU x2

## ▪ Specification

Door station	
Operation system	Embedded Linux operation system
Flash	32 MB
RAM	256MB
Door station	
Camera	2MP HD camera
Night vision	Low illumination IR supplement mode:3 m
Backlight compensation	Support
Digital noise reduction	Support
WDR	True WDR
Field of view	Horizontal: 131° Vertical: 78°
Video Compression Standard	H.264; H.265; MJPEG
Stream	Main stream: 1080p@25fps, 720p@25fps Sub stream: 720@25fps,480@25fps
Motion detection	Support
Flash-avoid frequency	50 Hz, 60 Hz
Door station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G711U、 G711A、 G726、 AAC_LC、 AAC_LD、 OPUS、 G722.1
Audio compression Rate	64 Kbps
Door station	
Network protocol	TCP/IP, RTSP, IPV6,ONVIF
Wired network	10/100 Mbps Ethernet
Door station	
RS-485	1
Alarm input	4
Debugging port	1
TAMPER switch	1
Door station	
Power consumption	< 10 W
Working temperature	-40° C to 53° C(-40° F to 127.4° F)
Working humidity	10% to 95%
Dimension	138 mm × 65 mm × 27 mm
Installation	Surface mounting
Protection level	IP65
Indicator	2
Power supply	IEEE802.3af, standard PoE 12 VDC
Indoor station	
Operation system	Embedded Linux operation system
Memory	128 MB
Flash	32 MB

Indoor station	
Displays screen	7-inch colorful TFT screen
Display resolution	1024 × 600
Operation method	Capacitive touch screen
Indoor station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U
Audio compression Rate	64 Kbps
Indoor station	
Wired network	10/100 Mbps self-adaptive
Wireless network	Wi-Fi 802.11 b/g/n
Protocol	TCP/IP, SIP, RTSP
RS-485	1 RJ-45 10/100 Mbps self-adaptive
Indoor station	
RS-485	1
Alarm input	8-ch alarm inputs
Relay output	2
TF card	Max to 32 G, SD 2.0 or lower version
Indoor station	
Power consumption	≤ 6 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimension (L x W x H)	200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")

### ▪ Available Model


DS-KIS603-P(C)

DS-KIS603-P(C)/PL603-W

DS-KIS603-P(C)/HOUNGFU Te

DS-KIS603-P(C)/SARL AMS T/SKD

### ▪ Dimension

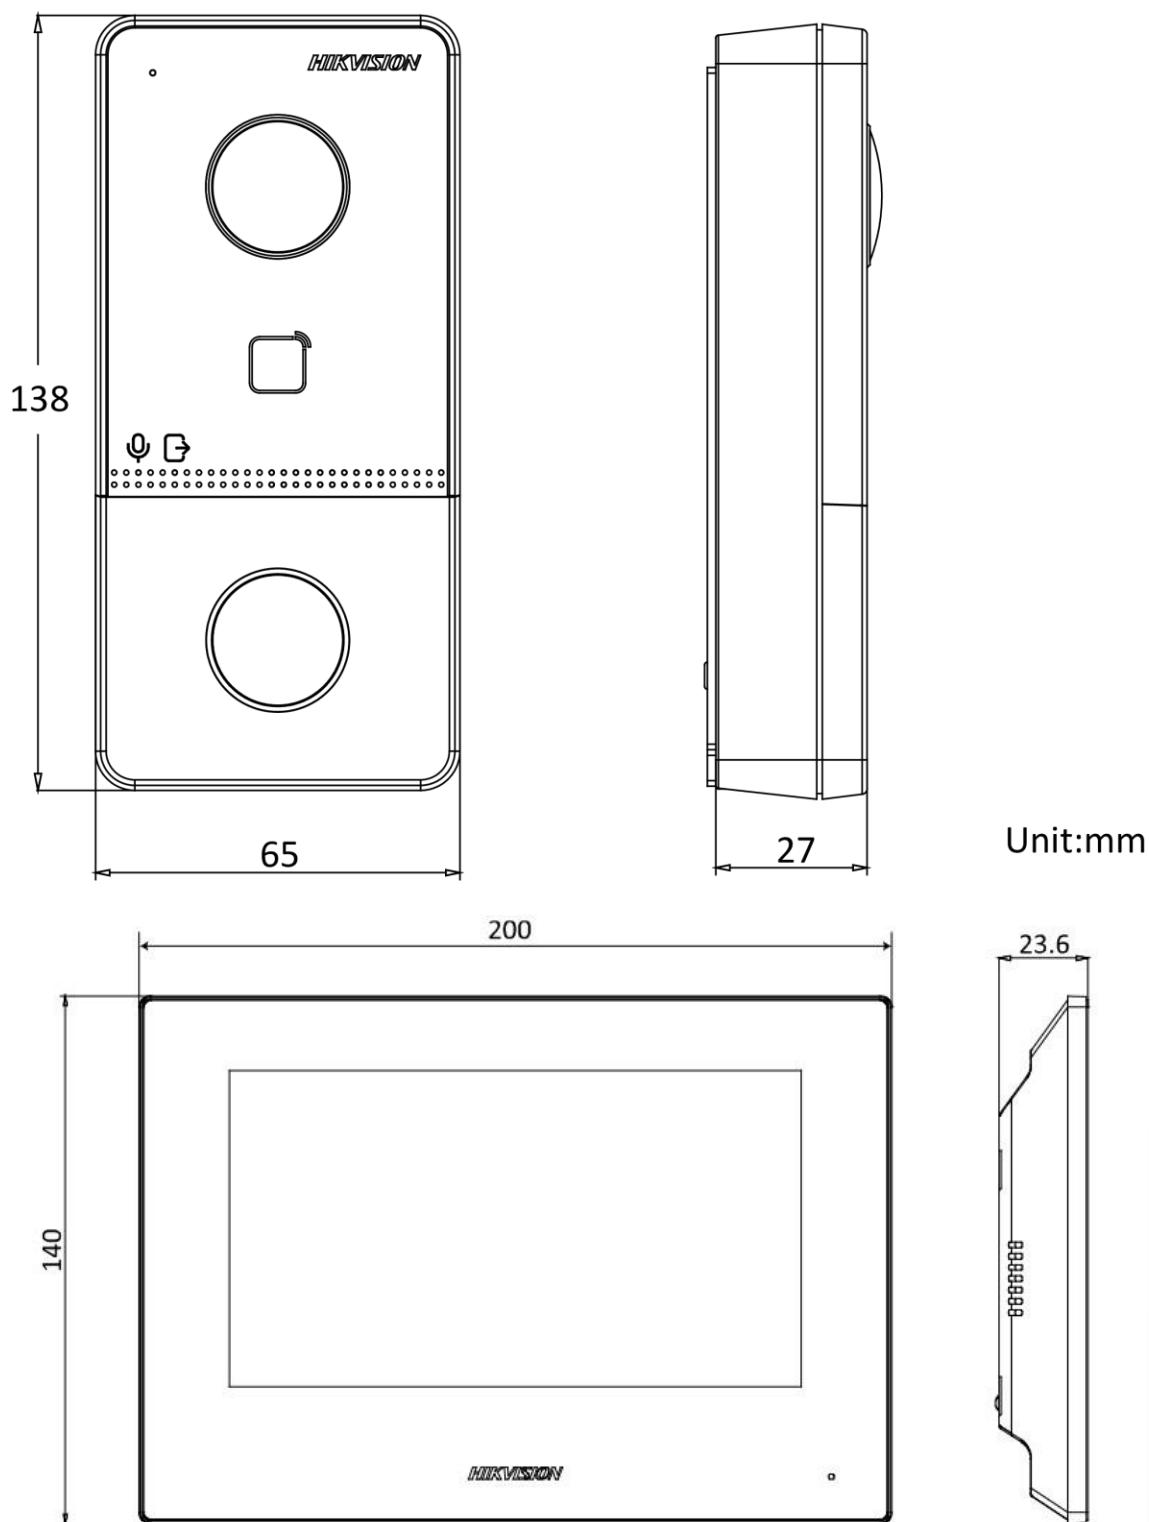

- Accessory
- Optional

DS-KABH6320-T

DS-KABV6113-A

DS-KABV6113-RS



# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

