



How to Configure the DS-PK670 Keypad Network


Title:	How to Configure the DS-PK670 Keypad Network	Version:	V1.0.x	Date:	2026/05/26
Product:	Keypad			Page:	1 of 4

Preparation

1. Connect the keypad to the AX HYBRID PRO G2 panel according to the user manual.
2. Make sure the keypad is registered with the panel.



How to Configure the DS-PK670 Keypad Network

1. Ensure that the keypad is properly registered with the panel

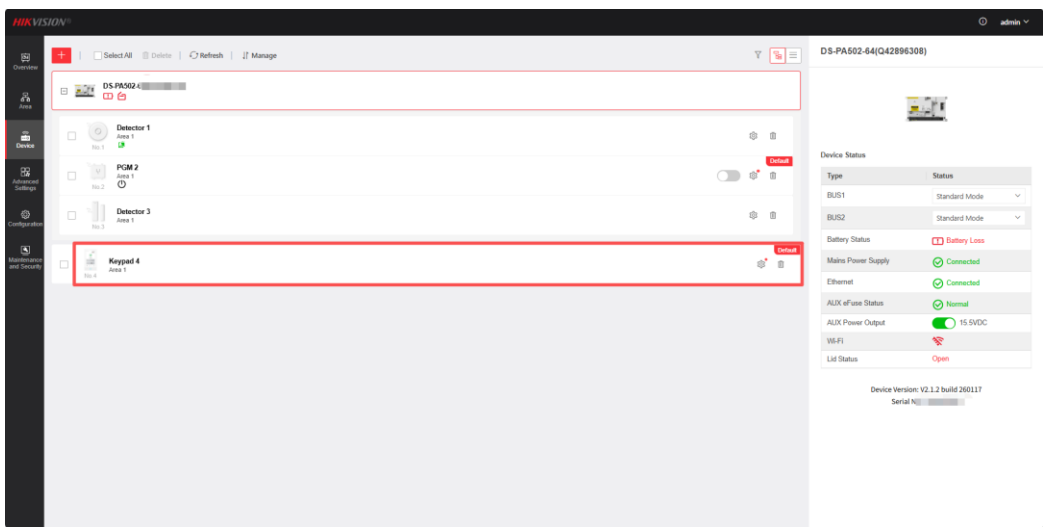


2. Check if the network is working properly

Check the top-right corner of the keypad to see if the circled icon has an exclamation mark. **If an exclamation mark appears on the circled icon**, the network is not working properly and needs to be configured.

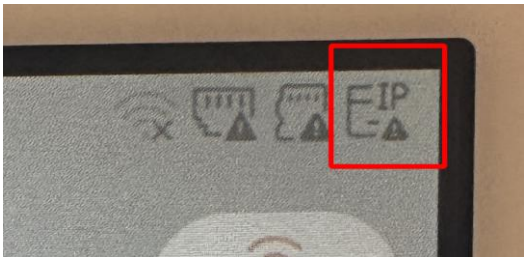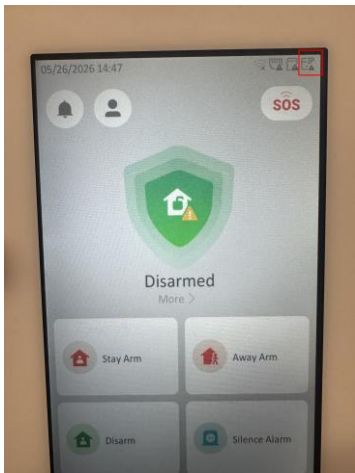


3. How to configure the keypad network

- 1) Log in to the device's web interface, go to the **User management**, and configure the keypad password for the **admin** or **installer** account.

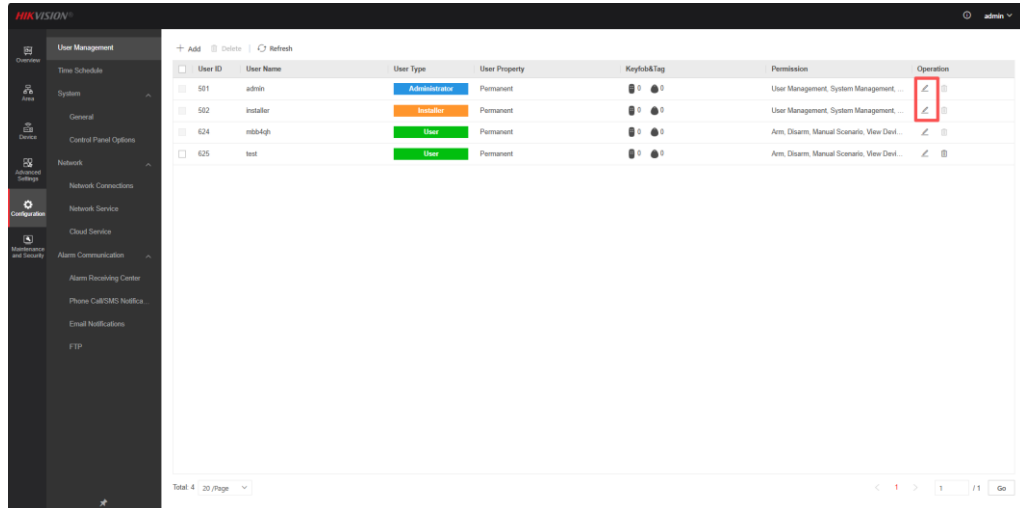


- 2) Enter the keypad password you want to set, then click **Save**.

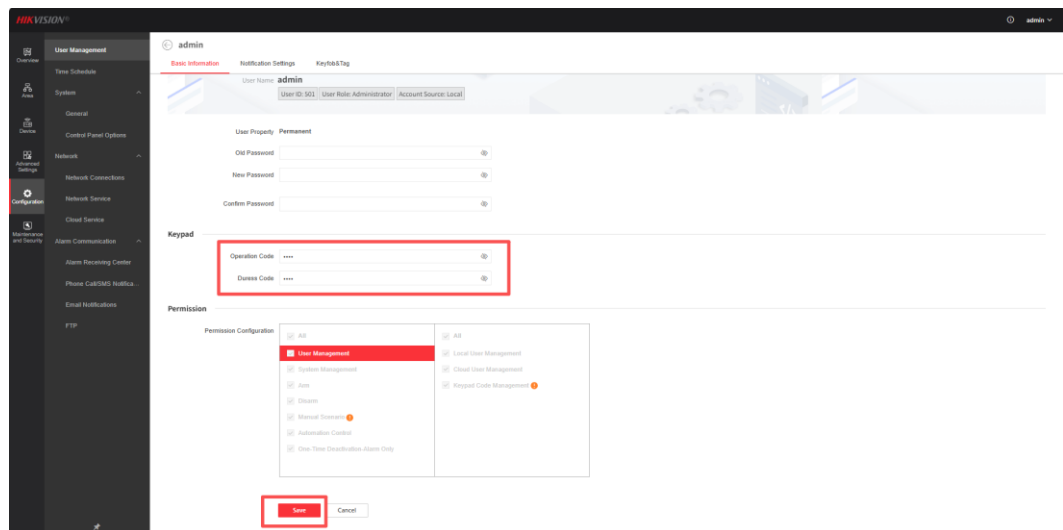


- 3) Keypad Operation.
 - a) Make sure your G2 panel and keypad are connected to the same local area network.
 - b) Click **Management** → Click **The circled keypad**


How to Configure the DS-PK670 Keypad Network

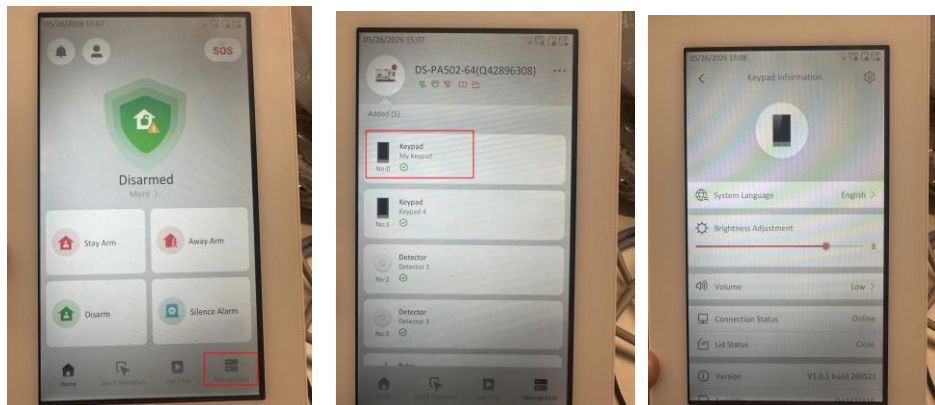

- c) Click **The settings icon in the upper-right corner** → Click **Network Settings** → Configure the keypad to use the same local area network as the panel

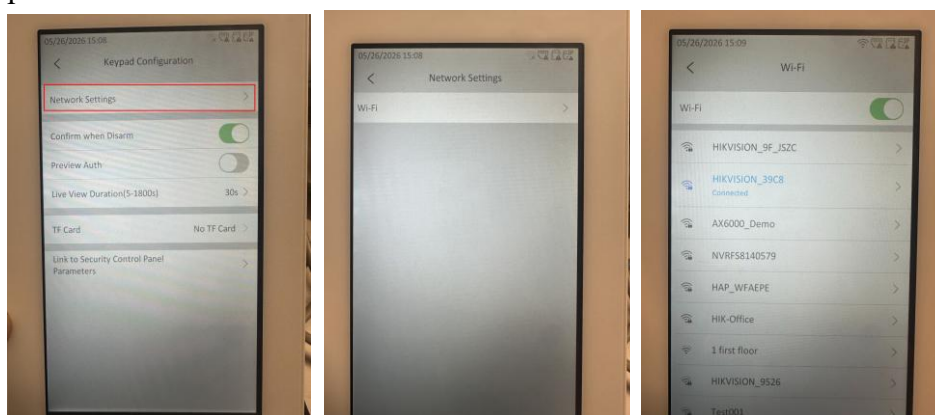



- d) Click **Link to Security Control Panel Parameters** → Enter “admin” or “installer” for the Username → Enter the corresponding password for the user.

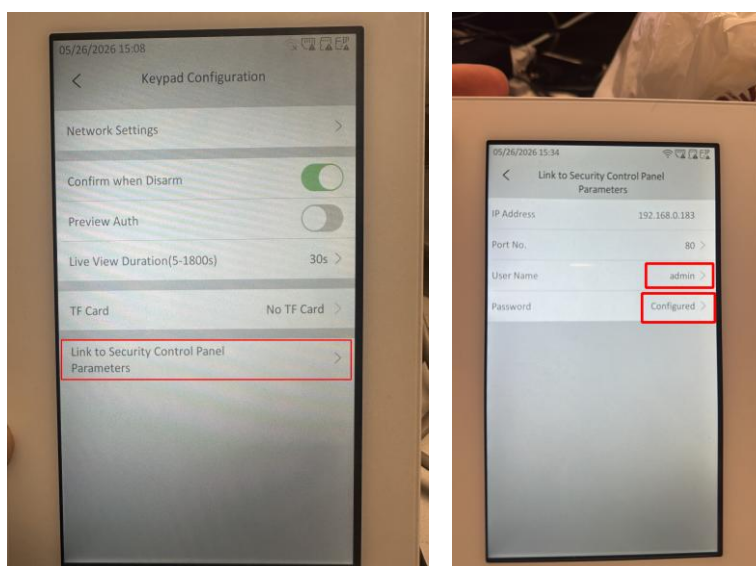

- e) Click **Link to Security Control Panel Parameters** → Enter “**admin**” or “**installer**” for the Username → Enter the corresponding password for the user.

Once the username and password are correct, **the exclamation mark on the icon in the upper-right corner will disappear**, indicating that the keypad network configuration was successful. Thanks!

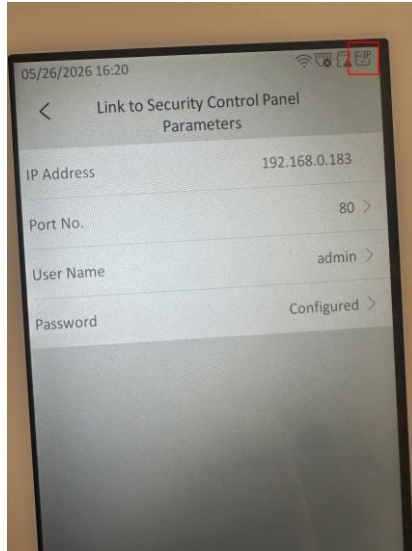

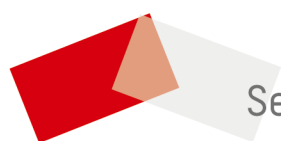

See Far, Go Further