

HYPERION ONE WL

WHITE LIGHT LED ILLUMINATOR



Energy Saving



Wall/Housing
mount bracket



Water Proof



No External
PSU



Maintenance
Free



Vandal Proof

High Performances

The latest smt led tecnology dare high performance and low power consumption

Ready for wall or camera housing

Easy to install, compatible with any camera housing! Wall/Housing bracket included.

Integrated power supply

The integrated constant current power supply allows a quick and easy installation without external box

Moulded full Aluminium body

The sturdy Aluminium body guarantees vandalproof performances as well as heat dissipation



tekno system[®]
Italian design for CCTV since 1979


Tekno System S.p.A.
Via Rostoncello, 1 - 36010 Carrè - Italy
Phone: +39 0445 314324 | Fax: +39 0445 314319
Email: info@teknosystem.eu | Web: www.teknosystem.eu

rev. 111110

Page 1 / 4

MODELS

ORDER CODE	Beam Angle	Max Distance		IP Rate	Power supply	Wall / Housing Bracket
HYP1 15 WL	15°	200 m	(219 yd)	IP66/67	Internal 230 VAC	●
HYP1 30 WL	30°	150 m	(164 yd)	IP66/67	Internal 230 VAC	●
HYP1 60 WL	60°	100 m	(109 yd)	IP66/67	Internal 230 VAC	●
HYP1 120 WL	120°	30 m	(33 yd)	IP66/67	Internal 230 VAC	●
HYP1 15 WL LV	15°	200 m	(219 yd)	IP66/67	Internal 12-24VAC/DC	●
HYP1 30 WL LV	30°	150 m	(164 yd)	IP66/67	Internal 12-24VAC/DC	●
HYP1 60 WL LV	60°	100 m	(109 yd)	IP66/67	Internal 12-24VAC/DC	●
HYP1 120 WL LV	120°	30 m	(33 yd)	IP66/67	Internal 12-24VAC/DC	●

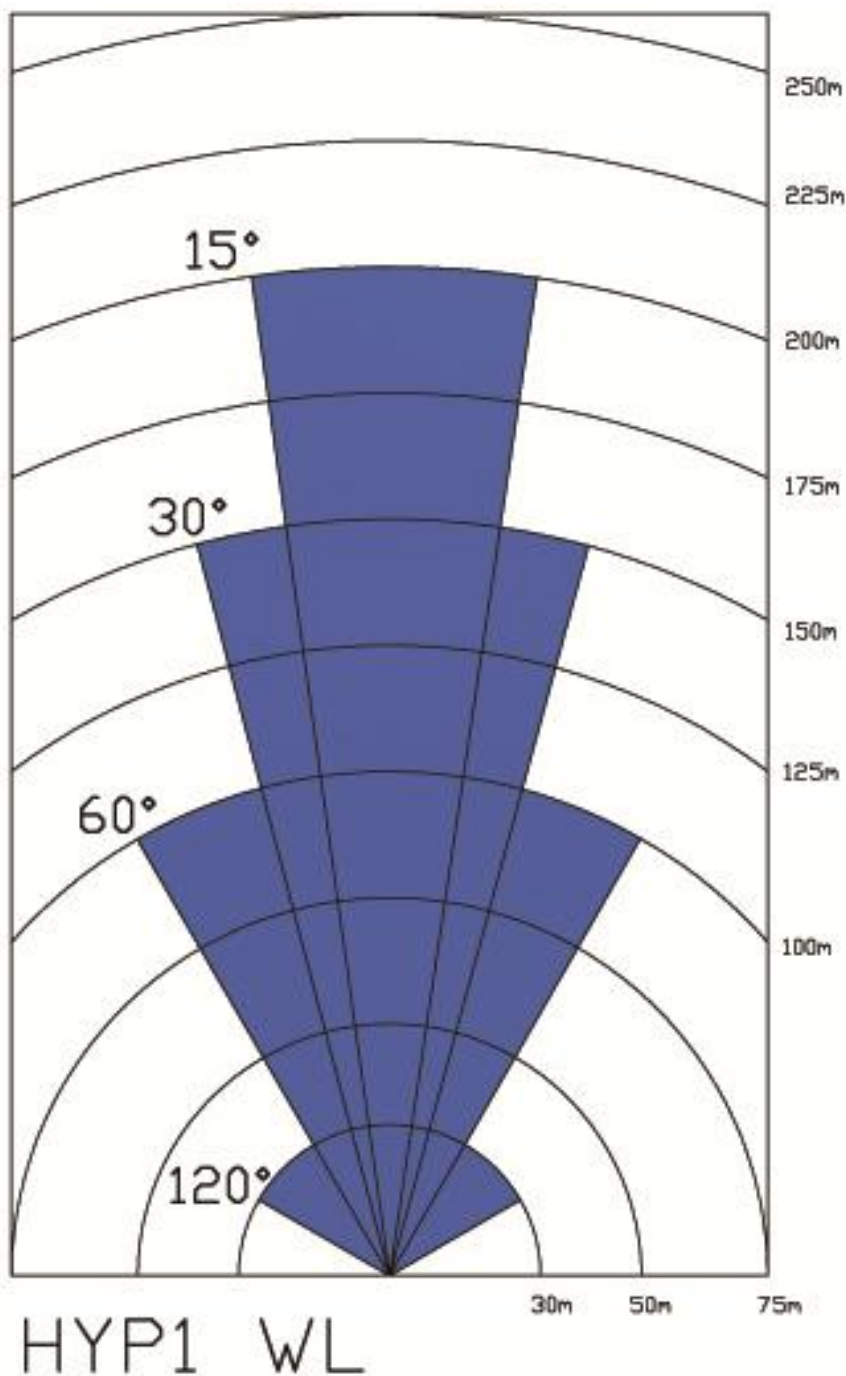



tekno system[®]
Italian design for CCTV since 1979

Tekno System S.p.A.
Via Rostoncello, 1 - 36010 Carrè - Italy
Phone: +39 0445 314324 | Fax: +39 0445 314319
Email: info@teknoystem.eu | Web: www.teknoystem.eu





rev. 111110


Page 2 / 4

ACCESSORIES

BWHYP1	Optional Wall Bracket for HYPERION ONE	
BWRHYP1	Hyperion One Adapter for LINEA R Camera Housing	

RELATED PRODUCTS

PA/1 (*)	Pole mount adapter for one bracket	
PA/2 (*)	Pole mount adapter for two brackets	
CM (*)	Corner mount adapter	
CR2	Photocell switch with adjustable threshold	

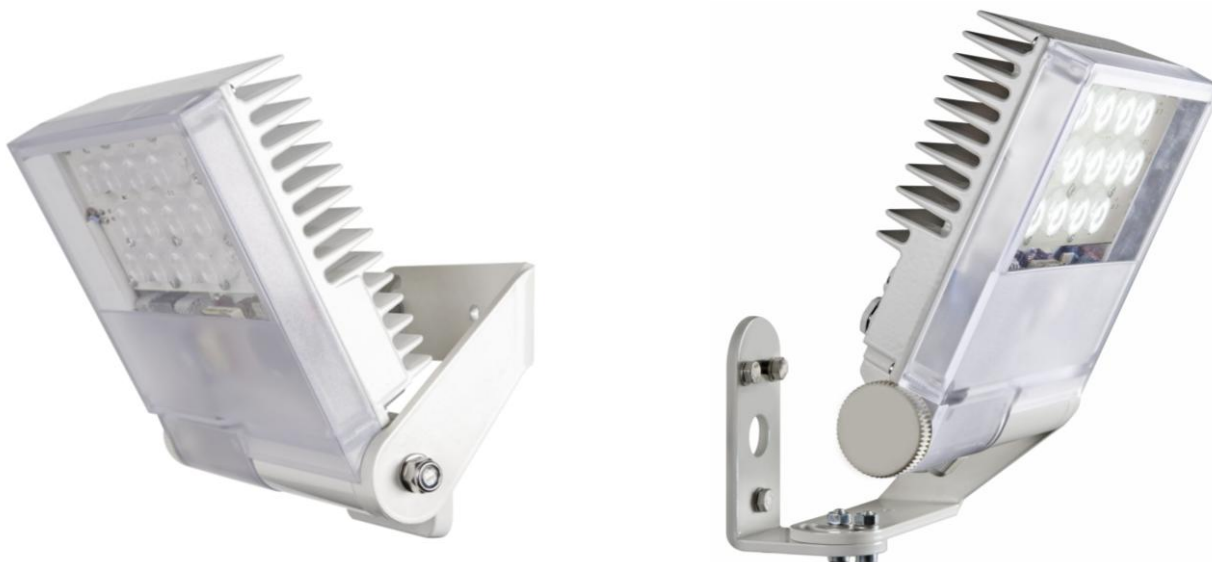

SPECIFICATION

General

- High efficiency SMT Leds
- PC optical beam collimator
- typ. color temperature: 6500 K
- luminous flux: about 1300 lumen
- Aluminium die cast molding and Technopolymers
- Radiant body for optimal thermal yield

Mechanical

- Dimensions: 192 x 195 x 83 mm
- Weight: 2,3 Kg
- Angle adjustable: NO
- Beam Pattern: see table
- 1 Cable Gland M16 x 1,5 ; precabled (2mt)
- 1 M16 Waterproof Plastic Cap

Electrical

- Power supply: Internal 230 VAC
Internal 12-24VAC/DC (LV version)
- Power: 17 W

Environmental

- Indoor / Outdoor applications
- IP66 and IP67 weatherproof rating (EN60529)
- Temperature Range : -50°C to 50°C
- RoHS compliant
- CE




tekno system[®]
Italian design for CCTV since 1979

Tekno System S.p.A.
Via Rostoncello, 1 - 36010 Carrè - Italy
Phone: +39 0445 314324 | Fax: +39 0445 314319
Email: info@teknosystem.eu | Web: www.teknosystem.eu

rev. 111110

Page 3 / 4

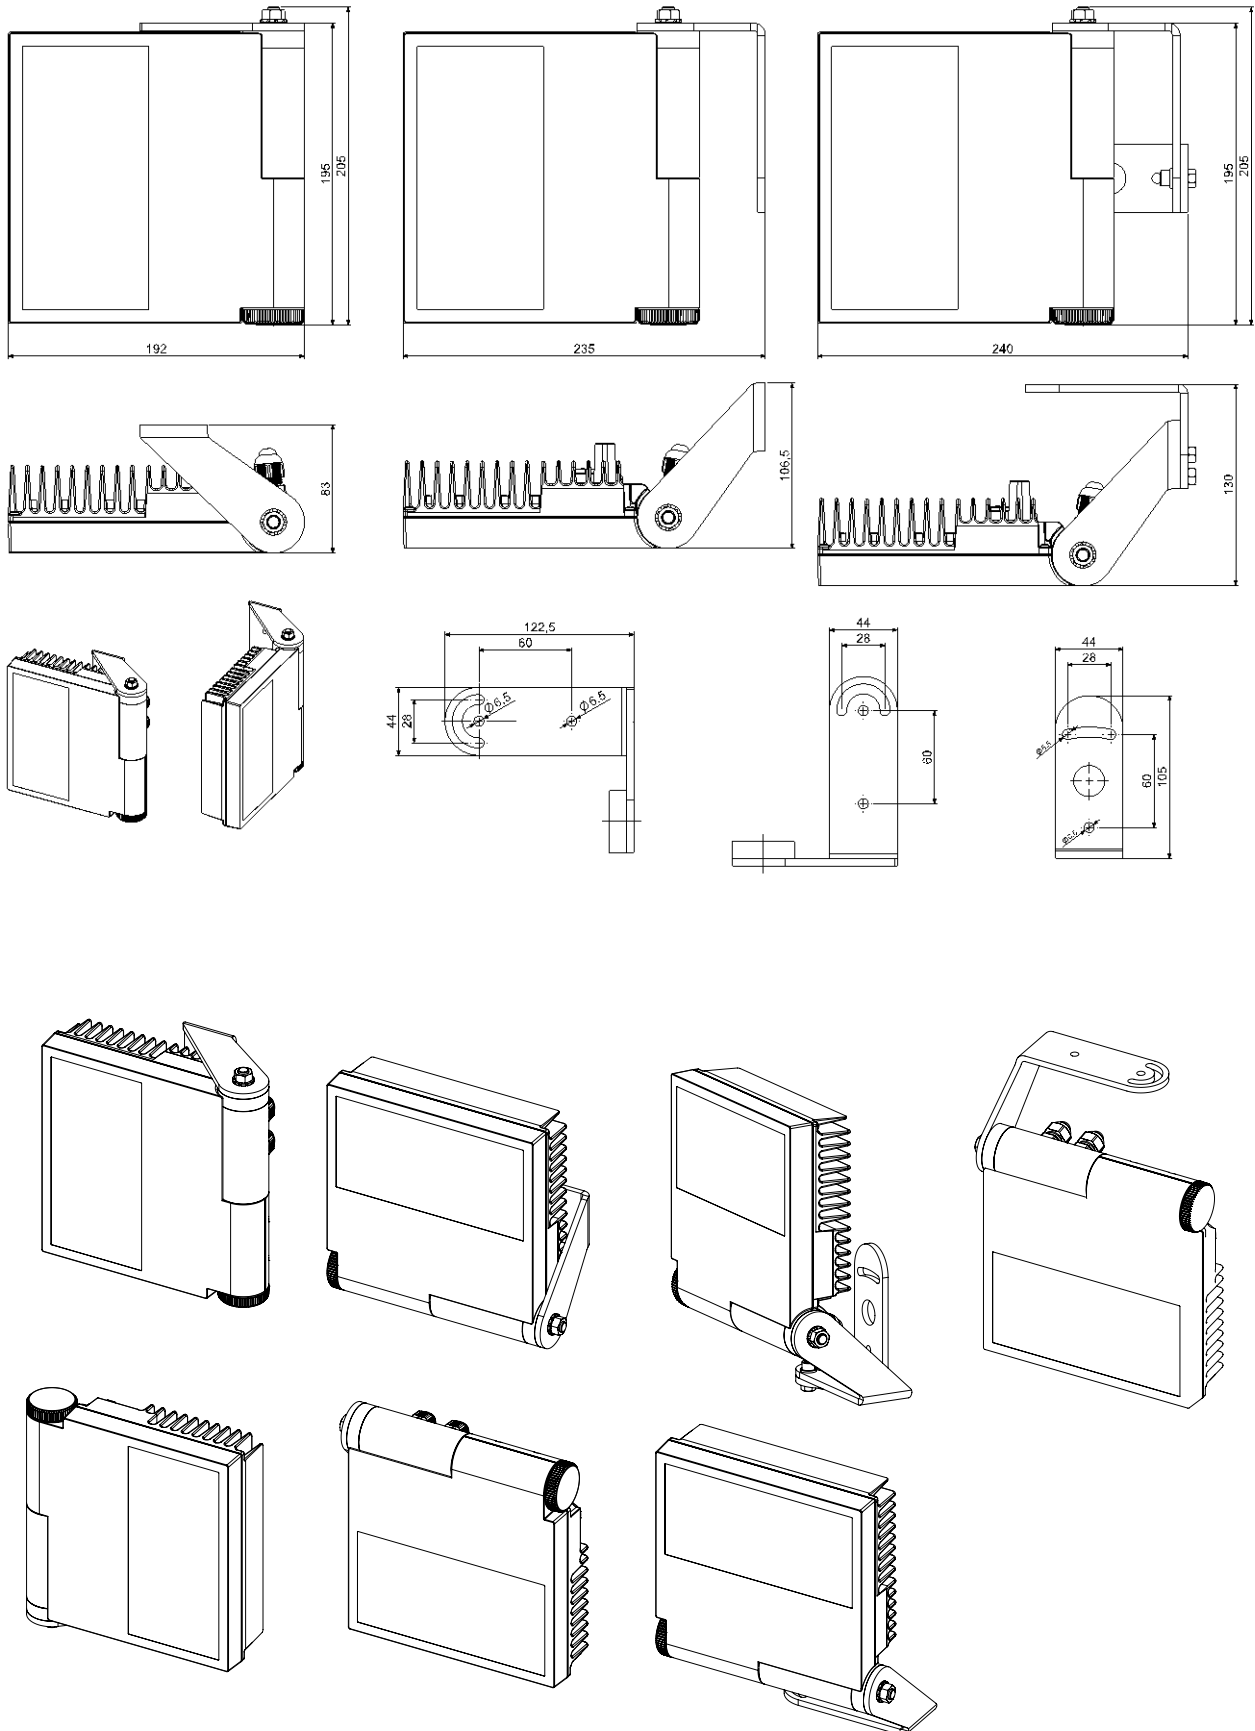

tekno system[®]
 Italian design for CCTV since 1979

Tekno System S.p.A.
 Via Rostoncello, 1 - 36010 Carrè - Italy
 Phone: +39 0445 314324 | Fax: +39 0445 314319
 Email: info@teknosystem.eu | Web: www.teknosystem.eu

rev. 111110

Page 4 / 4