




JCC-MIR491WHQ JCC-MIR493WHQ

Outdoor 40M IR Cameras

Features

- 1/3" Sony Super HAD CCD
- Sony HQ1 DSP
- 540 TV Lines
- 0.4@F2.0; 0Lux (IR On)
- External camera function adjustment (BLC, AES, AGC, and FL) & OSD(Optional)
- Built-in 42 Pieces IR-LED
- Effective Range up to 40m and Low / Mid / High Level selectable
- Internal wire system with anti-cut bracket
- Only DC Voltage, low power consumption
- IR-Cut filter removeable function
- IP66 Weatherproof Standard
- Built in Heater (JCC-MIR493WHQ)

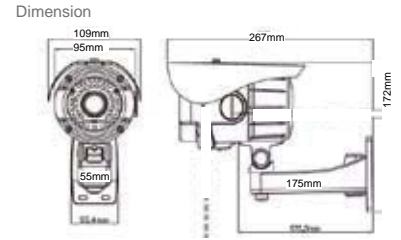

Specification

Model	JCC-MIR491WHQ	JCC-MIR493WHQ
Image Device	1/3" Sony Super HAD CCD(High Res.)	1/3" Sony Super HAD CCD(High Res.)
Picture Element	NTSC: 768 x 494 PAL: 752 x 582	NTSC: 768 x 494 PAL: 752 x 582
Resolution	540 TV Lines	
Minimum Illumination	0.4Lux@F2.0, 0Lux(IR On)	
Lens	3.7-12.0mm, external focus adjustable	
OSD	---	---
ICR	Yes	Yes
Horizontal Frequency	NTSC: 15.734 KHz. PAL: 15.625 KHz.	
Vertical Frequency	NTSC: 59.94 Hz. ; PAL: 50 Hz.	
Synchronization	Internal	
Scanning System	2 : 1 Interlace	
S/N Ratio	More than 48dB(AGC OFF)	
Electronic Shutter	1/50(60)sec.~1/100,000sec.	
Gain Control	High / Low	
Backlight Compensation	ON / OFF	
White Balance	Auto	
Flickerless (F.L.)	ON / OFF	
Gamma Correction	0.45	
Video Output	1.0 Vp-p Composite Video Output ; 75 Ohm	
Auto Iris	DC Drive	
Heater	---	Built-in
Operating Temperature	- 10°C~ + 50°C ; Heater: - 40°C~ + 50°C	
Power Consumption	IR ON: Max.840mA / IR OFF: Max.250mA ; Heater ON: 1560mA	
Power Supply	12Vdc	