


CODE: **AWO232EI v1.0**  
 NAME: **7/EI40/PAR/L**

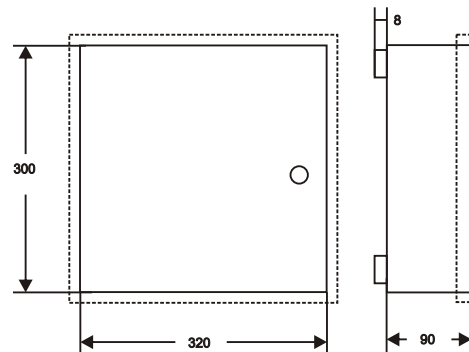

### DESTINATION

#### PARADOX

##### 7Ah:

1) (728 ULT, E55, E65, SP5500, 6000, 7000, EV048, 192, MG4000, 5000, 5050, PS17, ACM12) + 2x ZX8 ( 4xZX4, APR3- ADM2,APR3-HUB2, PGM4)

##### 17Ah:

1) (728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, MG5000, 5050, PS17, ACM12) + ZX4

### TECHNICAL DATA

<b>Dimensions:</b>	<b>internal:</b> W=320, H=300, D=90 <b>external:</b> W1=325, H1=305, D1=98mm [mm, +/-2]
<b>Weight net/gross:</b>	3,00kg / 3,20kg [ +/-0,1kg]
<b>Battery space:</b>	17Ah/12V Sealed Lead Acid (SLA)
<b>Transformer:</b>	EI 40VA/16V/18V
<b>Primary winding</b>	
<b>fuse transformer:</b>	T315mA
<b>Power supply:</b>	230V/AC (-15%/+10%), 50Hz, 200mA (max.)
<b>Power supply output:</b>	U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2,2A or I2=2,0A (max.)
<b>Operating environment:</b>	class II , -10°C+ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts
<b>Closing:</b>	screwed x 4
<b>Notes:</b>	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal,
<b>Certification, declaration:</b>	CE, RoHS