


**CODE:** AWO500 v1.5/II  
**NAME:** 17/TRZ40/S-F

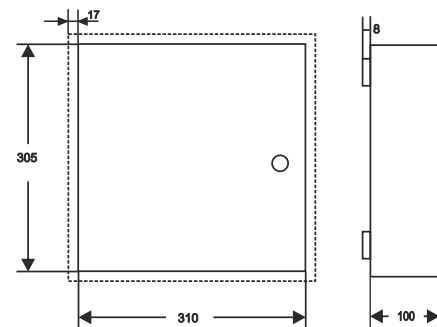

## DESTINATION

### 7Ah mounting plate 500D:

**DSC:** PC1616, 1832, 1864, 4020+ 5108 ( 4108, 5208, 5100, 4116)

**MODULES:** 1) 3x ( 4108, 5108, 5208, 5100, 4116)  
 2) 4204, 4216, 4580, 5400, 5204, 5580, 5200+ 5108 ( 4108, 5208, 5100, 4116)

**PARADOX:** 728 ULT, E55, 65, SP4000, SP5500, 6000, 7000, EV048, 192+ ZX4

**MODULES:** 1) ZX8, APR3- HUB2, PGM4  
 2) 2x ZX4

**RISCO:** 1) PRO24, 116, 128, 140

**MODULES:** EZ16 ( E04, EZ8)

**SATEL:** 1) CA4V1, 5,6,10, VERSA 5,10,15, INTEGRA 24, 32+ CA64E ( CA10E, SM, MST1)

**MODULES:** CA64( PP, EPS, ADR,O-R,O-ROC, O-OC,OPS-OC, OPS-R, OPS-ROC,VGM 16, SR,DR, PTSA, ACC-KP-PS)+CA64E ( CA10E, MST1, SM)

**PYRONIX:** 1) MATRIX 424, 6, 816, 832, 832+

**CROW:** 1) RUNNER 4,8

**TELMOR:** 1) TCA- 824

**ROEL:** SIGMA 6,12, CERBER

**ROGER:** 1) PR402, CPR 32- SE

**EBS:** 1) PX 202A

**PULSAR:** 1) MS1012, MSR1012, MSRK1012

2) MS2012, MSR2012, MSRK2012

### 17 Ah mounting plate 500B:

**DSC:** 1) PC1616, 1832, 1864, 4020+ 5108 ( 4108, 5208, 5100, 4116)

**MODULES:** PC5204, 5400, 5580, 5200, 4216, 4204+ 5108 ( 5208, 4108, 5100, 4116)

**PARADOX:** 1) E55,65, 728ULT, SP5500, 6000, 7000, EV048, 192+ ZX8 ( ZX4, HUB2)

**RISCO:** 1) PRO24

**SATEL:** 1) CA4V1, 5,6, 10, VERSA 5,10,15, INTEGRA 24, 32+ CA64E ( CA10E, SM, MST1)

**MODULES:** CA64( PP, EPS, ADR,O-R, O-ROC,O-OC, OPS-OC,OPS-R, OPS-ROC, DR, ACC-KP-PS,VGM16, SR, PTSA)+ CA64E (CA10E, SM, MST1)

**PYRONIX:** 1) MATRIX 424,6,816,832,832+

**CROW:** 1) RUNNER 4,8

**TEXECOM:** 1) PREMIER 412, 816, 832

**TELMOR:** 1) TCA 824+ TEX 800

**ROGER:** 1) PR 402, CPR 32- SE

**EBS:** 1) PX 202A

**PULSAR:** 1) MS1012, MSR1012, MSRK1012

2) MS2012, MSR2012, MSRK2012

## TECHNICAL DATA

**Dimensions:** internal: W=310, H=305, D=100 external: W1=345, H1=340, D1=110mm [mm, +/-2]

**Weight net/gross:** 4,65kg / 4,95kg [+/-0,1kg]

**Battery space:** 17Ah/12V Sealed Lead Acid (SLA)

**Transformer:** TRZ 40VA/16V/18V in the case of PC/ABS in class UL94-V0, IP43

**Power supply:** 230V/AC (-15%/+10%), 50Hz, 200mA (max.)

**Power supply output:** U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2.2A or I2=2.0A (max.)

**Operating environment:** class II , -10°C+ 40°C

**Material description:** sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

**Destination:** indoor

**Tamper protection:** 1 x microswitch: opening, 0,5A@50V/DC max. NC

**Closing:** lockable (MR 008 - different code)

**Notes:** flush type casing, removable back mounting plate and front frame, easy door removal, distance from wall - 8mm

**Declaration, warranty:** CE, warranty – 2 year from the production date