


CODE: AWO510 v1.6/II
NAME: 17/TRZ40/M-F

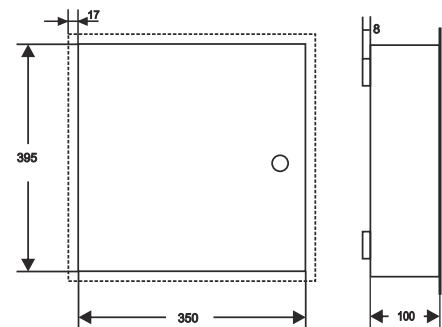

DESTINATION

DSC: 1) PC1616, 1832, 1864, 4020+ 3x 5108 (4108, 5208, 5100, 4116)

Modules: PC5204, 5400, 5200, 5580, 4216, 4204+ 3x 5108 (4108, 5208, 5100, 4116)

PARADOX: 1) E55, 65, 728ULT, SP4000, 5500, 6000, 7000, EVO48, 192+ZX8 (ZX4, APR3- ADM2, APR3- HUB2, PGM4)

RISCO: 1) PRO24, 116, 128, 140+ RP296EPS

SATEL: 1) CA4V1, 5,6,10, VERSA5, 10, 15, INTEGRA 24, 32+ 2x CA64E (CA10E, SM, MST1)
 2) INTEGRA 64/128 + CA64E(CA10E, SM, MST1)

Modules: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS- R, OPS- ROC, VGM16, SR, PTSA)+ 2x CA64E (CA10E, MST1, SM)

PYRONIX: 1) Matrix 424, 6, 816, 832, 832+

TEXECOM: 1) Premier 412, 816, 832, 48, 88, 168, 640

TELMOR: 1) TCA-824+ TEX 800

ROGER: 1) PR402, CPR 32-SE

EBS: 1) PX202A

PULSAR: 1) MS1012, MSR1012, MSRK1012
 2) MS2012, MSR2012, MSRK2012

TECHNICAL DATA

Dimensions: internal:W=350, H=395, D=100 external: W1=385, H1=430, D1=110 [mm, +/-2]

Weight net/gross: 5,40kg / 5,85kg [+/-0,1kg]

Battery space: 17Ah/12V Sealed Lead Acid (SLA)

Transformer: TRZ 40VA/16V/18V in the case of PC/ABS in class UL94-V0, IP43

Power supply: 230V/AC (-15%/+10%), 50Hz, 200mA (max.)

Power supply output: U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2.2A or I2=2.0A (max.)

Operating environment: class II , -10°C+ 40°C

Material description: sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

Destination: indoor

Tamper protection: 1 x microswitch: opening, 0,5A@50V/DC max. NC

Closing: lockable (MR 008 - different code)

Notes: flush type casing, removable back mounting plate and front frame,
 easy door removal, additional side mounting plate(s), distance from wall - 8mm

Declaration, warranty: CE, warranty – 2 year from the production date