


# DS-1300HMI

## Introduction:


DS-1300HMI mobile monitor is used for the live view of mobile devices and suitable for many kinds of mobile environments. The appearance design is contracted and generous. Matching with the built in fixed support, it is suitable for bus, passenger cars, taxi and some other vehicle.




The remote control is used to adjust the display performance, such as brightness, chromaticity and contrast. The following image shows its interface.

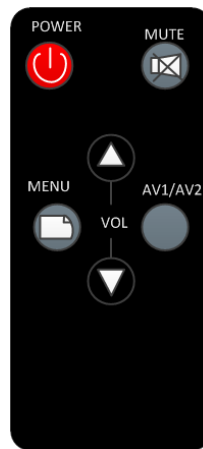

It has one connection line with two four-core aviation connectors. The design of aviation connector is used for adapting the terrible vehicle-mounted environment. The length of the connection line is 7m and both ends of the line are four-core aviation connectors. The following image shows the connector.

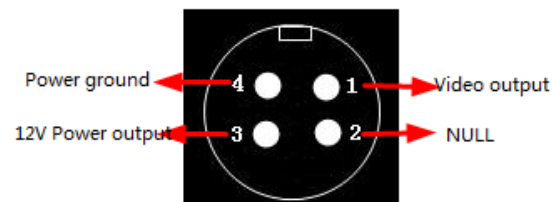

### Typical Application:

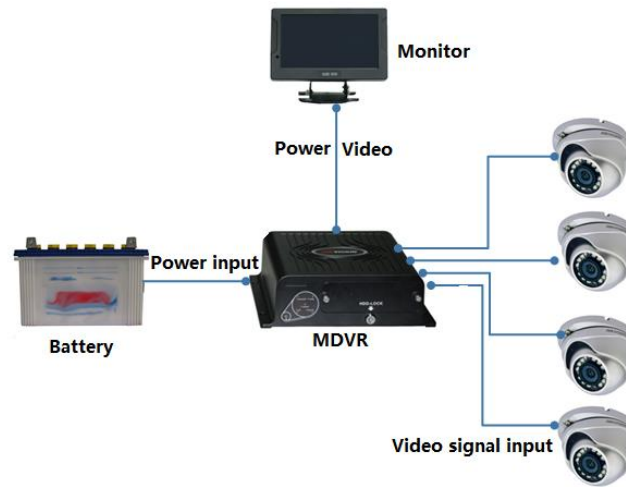

### Specification:

Model	DS-1300HMI
Dimension	7inch TFT-LCD
Backlight mode	LED
Resolution	800×480 RGB
Power consumption	≤5W
Weight	≤0.6Kg
Power supply	12V
Working temperature	-10°C~+55°C
Working humidity	10%~95%