

# DS-2CE16C8T-IW3Z

## HD720P Motorized Vari-focal HLC Bullet Camera




### Key features

- 1.27 Megapixel high-performance CMOS
- Analog HD output, up to 720P resolution
- Low illumination
- 6 – 22mm motorized vari-focal lens
- True Day/Night
- OSD menu, 3D DNR
- IP66 weatherproof
- Up the Coax(HIKVISION-C, Pelco-C Protocol)

### Available Models

DS-2CE16C8T-IW3Z

### Dimension

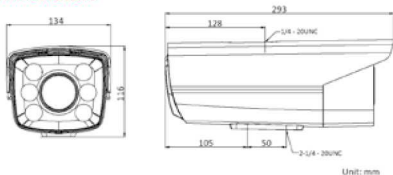

### Accessories



### DS-2CE16C8T-IW3Z

|                      |  |
|----------------------|--|
| <b>Camera</b>        |  |
| Image Sensor         | 1.27MP CMOS Image Sensor   |
| Signal System        | PAL/NTSC   |
| Effective Pixels     | 1305(H) * 977(V)   |
| Min. illumination    | 0.001 Lux @(F1.2,AGC ON), 0 Lux with white light                     |
| Shutter Time         | 1/25(1/30)s to 1/50,000s   |
| Lens                 | 6–22mm motorized VF lens   |
| Lens Mount           | Ø14  |
| Day & Night          | Color  |
| Synchronization      | Internal synchronization   |
| Video Frame Rate     | 720p@25fps/720p@30fps  |
| HD Video Output      | 1 Analog HD output   |
| CVBS Output          | 1Vp-p Composite Output(75Ω/BNC)                                      |
| S/N Ratio            | >62dB  |
| <b>Menu</b>          |  |
| Auto Gain            | Low/Middle/High/Off  |
| D/N Mode             | Color  |
| White Balance        | Auto/Manual  |
| Private Mask         | On/Off, maximum 8 zones  |
| Motion Detection     | On/Off, maximum 4 zones  |
| Exposure Mode        | Global Exposure/Digital WDR  |
| 3D DNR               | Low/Middle/High/Off  |
| Language             | English/Chinese  |
| Function             | Contrast/Sharpness/Saturation/Mirror/Digital zoom                    |
| White Light Control  | On/Off/1-5 adjustable level  |
| <b>General</b>       |  |
| Operating Conditions | -40°C ~60°C (-40 °F ~ 140 °F), Humidity 90% or less (non-condensing) |
| Power Supply         | 12 VDC±15%   |
| Power Consumption    | Max. 5W  |
| Protection Level     | IP66   |
| Light Distance       | 30-40m   |
| Communication        | Up the coax, Protocol: Pelco-C(CVBS output), HIKVISION-C(TVI output) |
| Dimensions           | 134×116×293mm(5.28×4.57×11.54)                                       |
| Weight               | 1600g  |