

## DS-2CS54A7P-PH

700TVL 1/3" CCD WDR Day/Night Pinhole Camera



### Key Features:

- High-Performance SONY CCD
- High Resolution, 700TVL, crystal-clear and exquisite image quality
- Min. Illumination 0.002Lux @ (F1.2,AGC ON),0.006Lux @ (F2.5,AGC ON)
- Support automatically electronic color/black switch to realize day/night surveillance
- More than 75 dB Wide Dynamic Range, Suitable for backlight conditions


### Application Scenarios:

Suitable for ATM outlets

### Order Models:

DS-2CS54A7P-PH

### Dimensions:

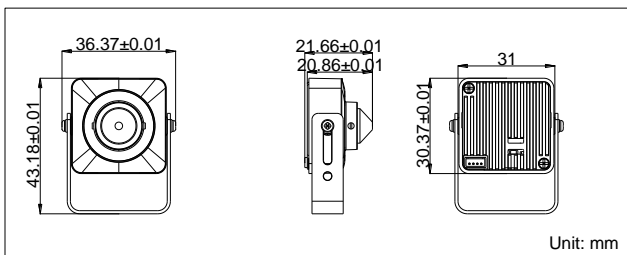

### Specification:

Parameter	Model
	DS-2CS54A7P-PH 700TVL 1/3" CCD WDR Day/Night Pinhole Camera
<b>Camera</b>	
Image Sensor	1/3" SONY SUPER HAD CCD II
Signal System	PAL/NTSC
Effective Pixels	976(H)×582(V)
Min Illumination	0.002Lux @ (F1.2,AGC ON) 0.006Lux @ (F2.5,AGC ON)
Shutter Speed	1/50s to 1/100,000s
Lens	3.7mm @ F2.5(2.8mm optional) Angle of view: 80°(2.8mm), 70°(3.7mm)
Lens Mount	M12
Day & Night	Electronic
Horizontal Resolution	700TVL
Wide Dynamic Range	>75dB
Synchronization	Internal Synchronization
Video Output	1Vp-p Composite Output(75Ω/BNC)
S/N Ratio	More than 62dB
<b>General</b>	
Working Temperature/Humidity	-10°C~60°C, Humidity 90% or less (non-condensing)
Power Supply	DC12V±15%
Power Consumption	2W MAX
Dimensions(mm)	30.37×31×20.86
Weight	200g(0.44lbs)