

## DS-2XE6825G0-(I)(L)Z(H)(S) 2 MP Explosion-Proof Network Bullet Camera



- Up to 2 MP high resolution
- 2.8 to 12 mm and 8 to 32 mm lens optional
- 120dB Wide Dynamic Range
- H.265, H.265+, H.264, H.264+
- Support on-board storage, up to 256GB

- ATEX: Ex II 2 G D Ex db IIC T6 Gb/Ex tb IIIC T80°C Db IP68
- IECEx: Ex db IIC T6 Gb/Ex tb IIIC T80°C Db IP68
- UL: Class I, Zone 1, AEx db IIC T6 Zone 21, AEx tb IIIC T80°C Ex db IIC T6 Gb X Ex tb IIIC T80°C Db X




## Specifications

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	Color: 0.009 Lux @ (F1.2, AGC ON), B/W: 0.0009 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Speed	1s to 1/100,000 s
Slow Shutter	Yes
Day & Night	IR Cut Filter
WDR	120 dB
Lens	
Lens Type	Varifocal lens, 2.8 to 12 mm and 8 to 32 mm lens
Auto-Iris	DC drive
Aperture	2.8 to 12 mm: F1.4 8 to 32 mm: F1.7, constant F1.7 throughout the zoom range
Focus	Auto, semi-auto, manual
FOV	2.8 to 12 mm, horizontal FOV 115° to 42°, vertical FOV 59° to 24°, diagonal FOV 141° to 48°; 8 to 32 mm, horizontal FOV 43° to 15°, vertical FOV 23° to 9°, diagonal FOV 50° to 17°
Lens Mount	Integrated
Illuminator	
Range	-I model: up to 100 m IR range -L model: up to 30 m whitelight range
Wavelength	-I model: 850 nm
Video	
Max. Resolution	1920 × 1080
Video Streams	5 defined streams
Main Stream	50Hz: 50fps (1920 × 1080, 1280 × 720); 60Hz: 60fps (1920 × 1080, 1280 × 720)
Sub-Stream	50Hz: 25fps (704 × 576, 640 × 480); 60Hz: 30fps (704 × 480, 640 × 480)
Third Stream	50Hz: 25fps (1920 × 1080, 1280 × 720, 704 × 576, 640 × 480); 60Hz: 30fps (1920 × 1080, 1280 × 720, 704 × 480, 640 × 480)
Fourth Stream	50Hz: 25fps (704 × 576, 640 × 480); 60Hz: 30fps (704 × 480, 640 × 480)
Fifth Stream	50Hz: 25fps (704 × 576, 640 × 480); 60Hz: 30fps (704 × 480, 640 × 480)
Video Compression	Main stream: H.265+/H.265/H.264+/H.264 Sub stream: H.265/H.264/MJPEG Third stream: H.265/H.264/MJPEG Fourth stream: H.265/H.264/MJPEG Fifth stream: H.265/H.264/MJPEG
H.264 Type	Baseline Profile/Main Profile/High Profile
H.264+	Main stream supports
H.265 Type	Main Profile
H.265+	Main stream supports
Video Bit Rate	32 Kbps to 16 Mbps

SVC	H.265 and H.264 support
<b>Audio (-S)</b>	
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM
Audio Bit Rate	64Kbps(G.711)/16Kbps(G.722.1)/16Kbps(G.726)/32-192Kbps(MP2L2)
Environment Noise Filtering	Yes
Audio Sampling Rate	8kHz/16kHz/32kHz/44.1kHz/48kHz
<b>Smart Feature-Set</b>	
Smart Event	Line crossing detection, up to 4 lines configurable Intrusion detection, up to 4 regions configurable Region entrance detection, up to 4 regions configurable Region exiting detection, up to 4 regions configurable Unattended baggage detection, up to 4 regions configurable Object removal detection, up to 4 regions configurable Scene change detection, audio exception detection (-S model), defocus detection
Basic Event	Motion detection, video tampering alarm, exception (network disconnected, IP address conflict, illegal login, HDD full, HDD error)
Face Capture	Detects up to 40 faces simultaneously
Hard Hat Detection	Detects up to 30 human targets simultaneously Supports up to 4 shield regions
Linkage Method	Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger alarm output (-S model), trigger recording, trigger capture
Region of Interest	4 fixed regions for main stream, sub stream, and third stream, and dynamic face tracking
<b>Image</b>	
Image Enhancement	BLC, HLC, Defog, EIS, Distortion Correction, 3D DNR
Image Settings	Saturation, brightness, contrast, sharpness, AGC, and white balance are adjustable by client software or web browser
Target Cropping	Yes
Day/Night Switch	Day/Night/Auto/Schedule/Triggered by alarm in (-S)
Picture Overlay	LOGO picture can be overlaid on video with 128 × 128 24bit bmp format
<b>Network</b>	
Network Storage	Support microSD/SDHC/SDXC card (256 G), local storage and NAS (NFS,SMB/CIFS), ANR Together with high-end Hikvision memory card, memory card encryption and health detection are supported.
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour, SSL/TLS
API	ONVIF (PROFILE S, PROFILE G), ISAPI, SDK
Security	Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for ONVIF, TLS1.2
Simultaneous Live View	Up to 20 channels
User/Host	Up to 32 users. 3 user levels: administrator, operator and user
Client	iVMS-4200, Hik-Connect, Hik-Central

Web Browser	Plug-in required live view: IE8-11 Plug-in free live view: Mozilla Firefox52+
<b>Interface</b>	
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port, optical interface FC -S: RS-485 (half duplex, HIKVISION, Pelco-P, Pelco-D, self-adaptive)
Audio (-S)	1 line in/out
Alarm (-S)	1 input, 1 output (max. 24 VDC, 1 A or 110 VAC 500 mA)
Interface Style	Connector Panel
Video Out	1Vp-p Composite Output (75Ω/CVBS)
On-board Storage	Built-in micro SD/SDHC/SDXC slot, up to 256 GB
<b>General</b>	
Firmware Version	V5.5.96
Web Client Language	32 languages. English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil)
General Function	Anti-flicker, 5 streams and 5 custom streams, heartbeat, mirror, privacy mask, pixel counter
Reset	Reset via reset button on camera body, web browser and client software
Startup and Operating Conditions	-H model: -40 °C to +60 °C (-40 °F to +140 °F), humidity 95% or less (non-condensing) Without -H model: -30 °C to +60 °C (-22 °F to +140 °F), humidity 95% or less (non-condensing)
Storage Conditions	-30 °C to +60 °C (-22 °F to +140 °F), humidity 95% or less (non-condensing)
Power Supply	100 to 240 VAC, PoE (42.5 to 57 V, 802.3at), terminal block
Power Consumption and Current	-L: 100 to 240 VAC, 0.4 A, max. 22 W; PoE (802.3at, 42.5 to 57 V), 0.55 to 0.45 A, max. 22 W -I: 100 to 240 VAC, 0.4 A, max. 18 W; PoE (802.3at, 42.5 to 57 V), 0.55 to 0.45 A, max. 18 W
Material	Stainless steel 316L & anti-corrosion coating
Heater	-H: Yes
Dimensions	Camera: 352 × 200 × 214 mm (13.6" × 7.9" × 8.4") With package: 438 × 283 × 303 mm (17.2" × 11.1" × 11.9")
Weight	Camera: 14 kg (37.5 lb.) With package: 15 kg (40.2 lb.)
<b>Approval</b>	
EMC	FCC: FCC-SDoC(ANSI C63.4,FCC Part15 sub B) CE: CE-EMC(EN 55024:2010 +A1:2015,EN 55032:2015,EN 61000-3-2:2014,EN 61000-3-3:2013) RCM: AS/NZS 60950.1:2003 + Am1, Am2 and Am3,AS/NZS CISPR 32:2015 IC: IC-VoC(ICES-003 Issue 7:2020)


<p>Safety</p>	<p>UL: UL 60950-1:2014,CAN/CSA C22.2 No. 60950-1-07:2014            UL: Class I, Zone 1, AEx db IIC T6 Zone 21, AEx tb IIIC T80°C Ex db IIC T6 Gb X Ex tb IIIC T80°C Db X              CB: IEC IEC 60079-0            CE: CE-LVD(EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013)            BIS: IS 13252(Part 1)2010+A1:2013+A2:2015</p>
<p>Anti-Corrosion</p>	<p>NEMA 4X(NEMA 250-2014)            C5(ISO 6270-1, ISO 9227)</p>
<p>Protection</p>	<p>IP68 (IEC 60529-2013)</p>
<p>Explosion-proof Certificate</p>	<p>ATEX: Ex II 2 G D Ex db IIC T6 Gb/Ex tb IIIC T80°C Db IP68            IECEx: Ex db IIC T6 Gb/Ex tb IIIC T80°C Db IP68            For explosive gas atmospheres, the maximum surface temperature is 85 ° C;            For flammable dust atmospheres, the maximum surface temperature is 80 ° C;            IIC: for explosive gas atmospheres other than mines susceptible to firedamp;            For explosive gas mixture atmospheres: Zone 1, Zone 2, Zone 21, Zone 22.</p>

\*You are recommended to purchase memory card together with the product if needed. After ordering, the memory card will be installed to product during manufacturing.

## Available Model


DS-2XE6825G0-IZHS (2.8 to 12 mm), DS-2XE6825G0-LZHS (2.8 to 12 mm), DS-2XE6825G0-IZ (2.8 to 12 mm), DS-2XE6825G0-LZ (2.8 to 12 mm), DS-2XE6825G0-IZHS (8 to 32 mm), DS-2XE6825G0-LZHS (8 to 32 mm), DS-2XE6825G0-IZ (8 to 32 mm), DS-2XE6825G0-LZ (8 to 32 mm)

## Dimension

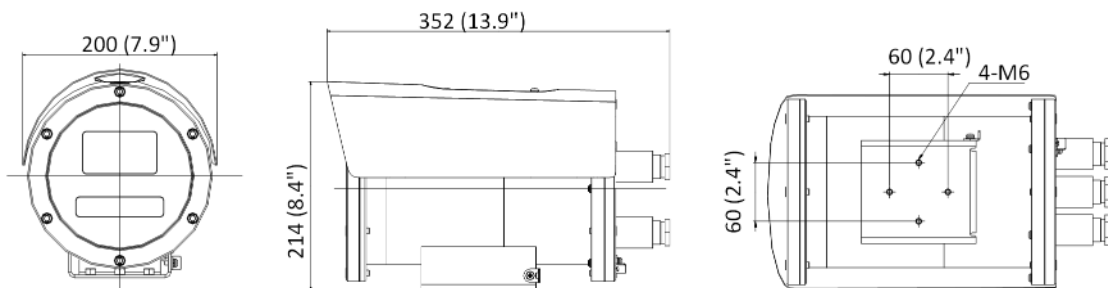

Unit: mm (inch)

## Accessory



**DS-1707ZJ-Y-AC (OS)**  
**Wall Mount**

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
sateru@hikvision.com

**Hikvision Korea**  
T +82-[0]31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com