

## DS-D5032FC 32" LCD Monitor


### key Features

- Support 8bit/10bit 2-ch LVDS(1920×1080) HD display;
- Adopt 3-D digital comb filter;
- True color OSD and user-friendly operation menu;
- 1 channel HDMI 1.3 input interface, support HDCP 1.2;
- Adopt 3D noise reduction technology;
- Support high definition JPEG decoding;
- Programmable 12-bit RGB gamma correction technology;
- Support software spread-spectrum technology to reduce EMI radiation;
- Adopt Mstar ACE-5 auto color and image enhancement engine, improve image contrast, detail and edge;

### Model:

DS-D5032FC

### Dimension:

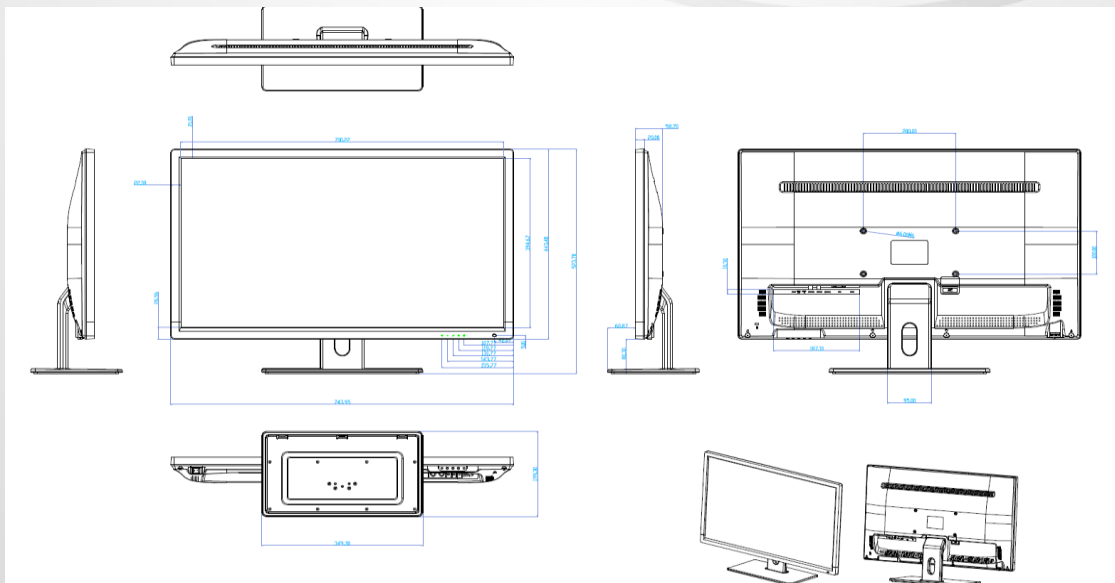

# DS-D5032FC 32" LCD Monitor



|                              |  |   |
|------------------------------|--|---|
| <b>Model</b>                 | <b>DS-D5032FC</b>                      |   |
| <b>Display Type</b>          | TFT-LED Backlight                      |   |
| <b>Screen Size</b>           | 32"                                    |   |
| <b>Dot Pitch (H×V)</b>       | 0.36375mm×0.36375mm                    |   |
| <b>Resolution</b>            | 1920x1080                              |   |
| <b>Brightness</b>            | 300cd/m <sup>2</sup>                   |   |
| <b>Contrast</b>              | 3000:1                                 |   |
| <b>Response Time</b>         | 6.5ms                                  |   |
| <b>Color</b>                 | 16.7 M                                 |   |
| <b>Viewable Area (H×V)</b>   | 698.40 mm x392.85mm                    |   |
| <b>Viewing Angle</b>         | Horizontal 178°, Vertical 178°         |   |
| <b>Interfaces</b>            | HDMI Input                             | 1 |
|                              | VGA Input                              | 1 |
|                              | BNC Input                              | 1 |
|                              | S-VIDEO Input                          | 1 |
|                              | BNC Output                             | 1 |
|                              | PC AUDIO-IN                            | 1 |
|                              | PC AUDIO-OUT                           | 1 |
| <b>VESA</b>                  | 200mm x 100mm                          |   |
| <b>Power Supply</b>          | 100 ~ 240V AC, 50/60Hz                 |   |
| <b>Power Consumption</b>     | ≤ 65W                                  |   |
| <b>Operation Temperature</b> | 5°C ~ 40°C                             |   |
| <b>Operating Humidity</b>    | 10%~85% (No Condensation)              |   |
| <b>Storage Temperature</b>   | -20°C ~ 55°C                           |   |
| <b>Bezel Material</b>        | Plastic                                |   |
| <b>Bezel Color</b>           | Black                                  |   |
| <b>Dimension (W×H×D)</b>     | 732.4mm×431.9mm×70.6mm                 |   |
| <b>Weight</b>                | 10.6Kg(Gross weight) , 8Kg(Net weight) |   |