


DS-D5032FL-B 31.5" Monitor



Key Features

- Industrial grade A+ LCD panel
- Designed for surveillance, high reliability and stability
- Abundant varieties of interfaces: BNC, VGA, digital interface and diversified interfaces
- 16.7 million color, display picture perfectly
- Support horizontal and vertical display
- Horizontal 178°, Vertical 178°
- Dedicated project RS232 interface
- Build-in loudspeaker, audio visual connection
- VESA standard
- Metal shell

Interfaces

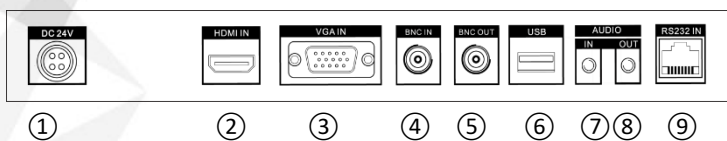

NO.	Description
1	24V DC power input
2	HDMI digital signal input
3	Analog VGA input
4	BNC input
5	BNC output
6	USB interface
7	Audio input
8	Audio output
9	RS-232 communication interface

Model



DS-D5032FL-B




Specifications

Model	DS-D5032FL			
Backlight	LED Backlight			
Screen Size	31.5"			
Pixel Pitch	0.36375 mm x 0.36375 mm			
Max Resolution	1920 x 1080			
Brightness	400 cd/m ² (Typical)			
Contrast	3000 : 1			
Response Time	10 ms			
Color	16.7 M			
Active Area	698.40 mm x 392.85 mm			
Viewing Angle	Horizontal 178°, Vertical 178°			
Interfaces	VGA Input	1	RS-232 interface	1
	BNC Input	1	IR Receiver	1 (for remot control)
	BNC Output	1	Audio input	1
	USB 2.0 Interface	1	Audio output	1
	HDMI input	1	VGA Input	1
Power Supply	24 VDC; 100 to 240 VAC, 50/60Hz			
Power Consumption	≤ 60 W			
Standby Power Consumption	< 0.5 W(Standby)			
Loudspeaker	3W x 2			
Working Temperature	0 °C ~ 40 °C(32°F ~ 104°F)			
Working Humidity	10% ~ 90% (No Condensation)			
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)			
Storage Humidity	10%~90% (No Condensation)			
Color of Casing	Black			
VESA	4-M6 200 mm * 200 mm			
Dimensions(W*H*D)	737.4 mm × 452.5 mm × 70.65 mm			
Packing Dimensions(W*H*D)	881 mm x 630 mm x 205 mm			
Gross Weight	19 kg			
Net Weight	12 kg			
Accessories	Power cord	1		
	User manual	1		
	Warranty card	1		
	Remote control	1		
	Battery	2		
Bracket	Pedestal	Optional	DS-DM3201B	
	Wall mounted	Optional	DS-DM1940W	
*Note	All specifications mentioned above are subject to the actual product			

Dimensions (unit: mm)

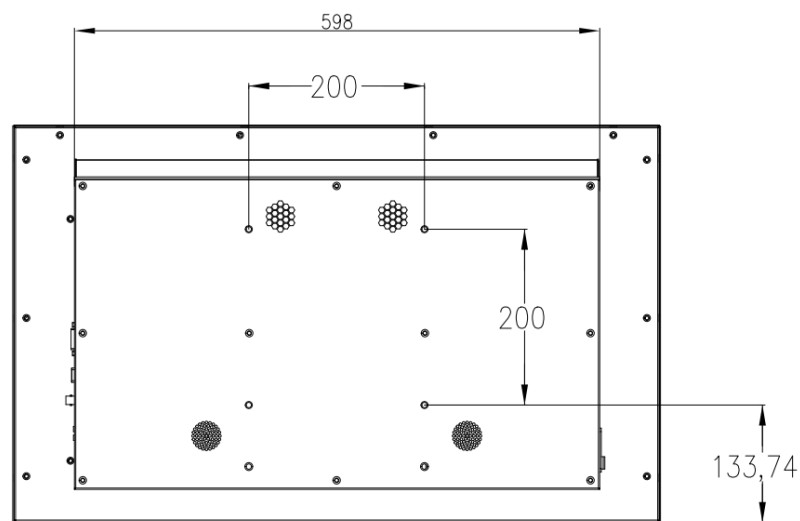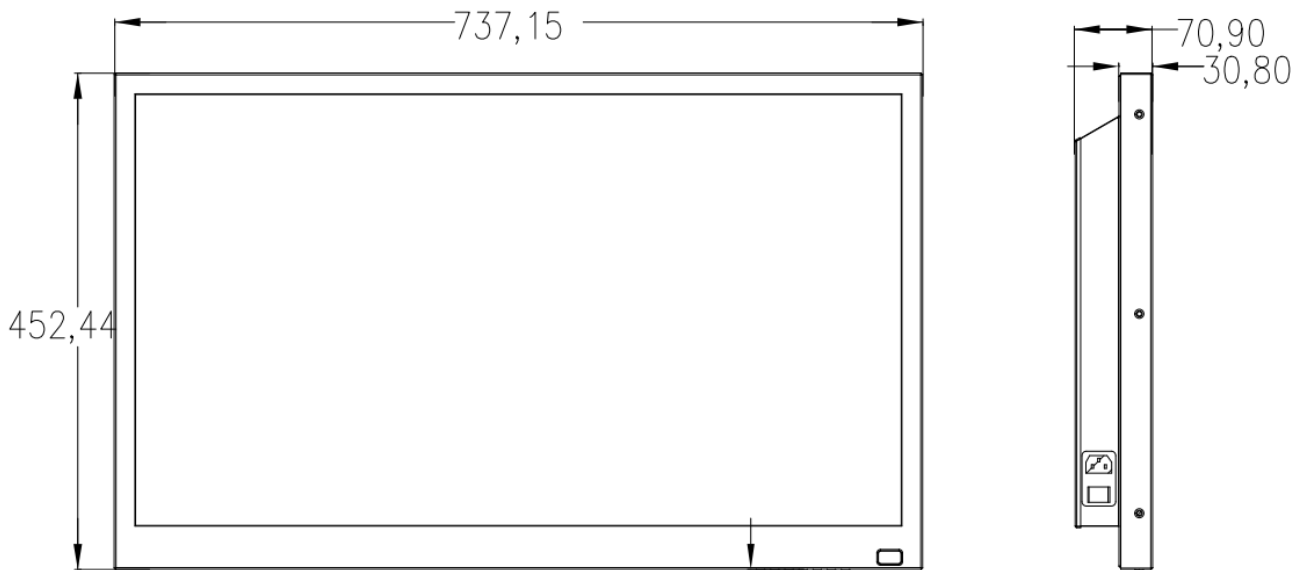

Distributed by

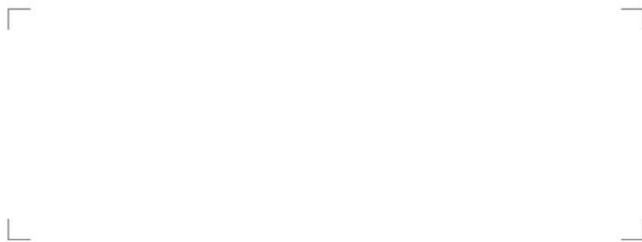

Headquarters

No.555 Qianmo Road, Binjiang District,
 Hangzhou 310051, China
 T +86-571-8807-5998
 overseasbusiness@hikvision.com

Hikvision USA
 T +1-909-895-0400
 sales.usa@hikvision.com

Hikvision Europe
 T +31-23-55-42-770
 info.eu@hikvision.com

Hikvision Middle East
 T +971-4-8816086
 salesme@hikvision.com

Hikvision Russia
 T +7-495-669-67-99
 saleru@hikvision.com

Hikvision India
 T +91-22-28469900
 sales@pramahikvision.com

Hikvision Italy
 T +39-0438-6902
 info.it@hikvision.com

Hikvision France
 T +33(0)1-85-330-450
 info.fr@hikvision.com

Hikvision Spain
 T +34-91-737-16-55
 info.es@hikvision.com

Hikvision Poland
 T +48-22-460-01-50
 poland@hikvision.com

Hikvision UK
 T +01628-902140
 support.uk@hikvision.com

Hikvision Singapore
 T +65-6684-4718
 sg@hikvision.com

Hikvision Oceania
 T +61-2-8599-4233
 salesau@hikvision.com

Hikvision Canada
 T +1-909-895-0400
 sales.usa@hikvision.com

Hikvision Korea
 T +82-31-731-8841
 sales.korea@hikvision.com

Hikvision Brazil
 T +55 11 3318-0050
 Latam.support@hikvision.com

Hikvision Africa
 T +27 (10) 0351172
 sale.africa@hikvision.com

Hikvision Hong Kong
 T +852-2151-1761