

## DS-D60S-B Series Digital Signage Server



### Features and Functions

#### Hardware Structure

- 2U standard chassis, and suits various needs of information delivery system
- Standard rack-mount design and carrier-grade ATCA chassis system
- Smart heat dissipation to ensure stable system running
- Expandable built-in HDD interfaces

#### Programs and Schedules

- Scheduled programs playing by day/week/custom time
- Configurable paly items, playlists and play plans.
- Program and materials inter-cut
- Programs playing in terminal groups
- Supports uploading, downloading, revising, and deleting programs and schedules
- Programs and schedules configured to sharing/private

#### Terminals Management

- Add terminals by MAC address
- Remote reboot and shutdown of terminals

#### Multi-Level Management

- Multi-level user management with different permissions authorized
- Supports material and programs sharing

#### Materials Management


- Various materials support in pictures, audio files, video files, PDF files, HTML, dynamic webpages, rolling subtitles, live broadcasting, third-party data, etc.

#### Operation and Maintenance

- Built-in gigabyte (GB) network interface
- Remote parameters view and configuration, and configuration file importing and exporting
- Remote view of system operation status and system logs
- Remote system reboot, default settings restoration and upgrade



## Physical Interfaces

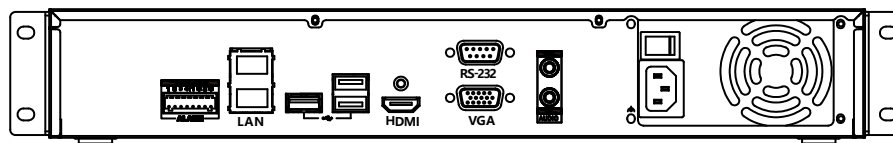

## Specifications

Model	DS-D60S-B	
Hard drive	Type	4 SATA interfaces for 3.5-inch HDD
	Capacity	500 MB/1TB/2TB/2TB/4TB/5TB/6TB for each disk
External interfaces	Network	3 x RJ-45 10/100 Mbps self-adaptive Ethernet interface
	Serial interface	1 x RS-232 serial interface
	USB interface	1 x USB 3.0 2 x USB 2.0
General	Power supply	100 to 240 VAC
	Power consumption (hard disk excluded)	≤ 35 W
	Working temperature	0 to 45 ° C (32 to 113 ° F)
	Working humidity	10 to 90 % (non-condensing)
	Chassis	19-inch standard 2U chassis
	Dimensions	445 x 470 x 90 mm
Weight (without hard disk)	≤ 8 kg	

## Available Models

### DS-D60S-B

Distributed by



#### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

Hikvision Poland  
T +48-22-460-01-50  
poland@hikvision.com

Hikvision USA  
T +1-909-895-0400  
sales.usa@hikvision.com

Hikvision India  
T +91-22-28469900  
sales@pramahikvision.com

Hikvision UK  
T +44-1628-9021-4  
support.uk@hikvision.com

Hikvision Europe  
T +31-23-5542770  
saleseuro@hikvision.com

Hikvision Italy  
T +39-0438-6902  
info.it@hikvision.com

Hikvision Singapore  
T +65-6684-4718  
sg@hikvision.com

Hikvision Middle East  
T +971-4-8816086  
salesme@hikvision.com

Hikvision France  
T +33(0)1-85-330-444  
info.fr@hikvision.com

Hikvision Oceania  
T +61-2-8599-4233  
salesau@hikvision.com

Hikvision Russia  
T +7-495-669-67-99  
saleru@hikvision.com

Hikvision Spain  
T +34-91-737-16-55  
info.es@hikvision.com

Hikvision Hong Kong  
T +852-2151-1761