

DS-XS6612-S/B
Wall Mounted Cabinet

- The enclosures conform to 19-inch mounting standards, are compatible with ETSI standard equipment installations, and are designed for rack-mounted equipment in cabling, telecom, IT, industrial, and home.


▪ Specification

| Model | | DS-XS6612-S/B |
|----------------|---------------------------------|--|
| Specifications | Installation Method | Wall-mounted |
| | Internal Space | 12U |
| | Static Load Capacity | 40KG |
| | Dimensions (W*D*H) mm | 600*600*635mm |
| | Net Weight | 26KG |
| Parameters | Opening Percentage (Front Door) | 78% |
| | Opening Percentage (Rear Door) | 0 |
| | Front Door | 4mm Glass door,1mm SPCC |
| | Front and Rear Frame | 1.2mm SPCC |
| | Side Panel | 1.0mm SPCC |
| | Beam | 1.2mm SPCC |
| | Top Cover | 1.0mm SPCC |
| | Bottom panel | 1.0mm SPCC |
| | Vertical rail | 1.5mm SPCC |
| | Rear panel | 1.0mm SPCC |
| | Mounting bracket | 1.2mm SPCC |
| Others | Shelf | Optional |
| | FAN | Optional |
| | PDU | Optional |
| | Mounting Accessory Kit | User accessory kit: 12 sets M6 cage nuts; 2 pcs keys; 4 sets Expansion screws Mounting kit: 16 pcs M8*12 hex screws, 16 pcs M8 flange nuts, 12 pcs M4 tapping screws, 12 sets |

▪ Available Model

DS-XS6612-S/B(Overseas)

▪ Dimension

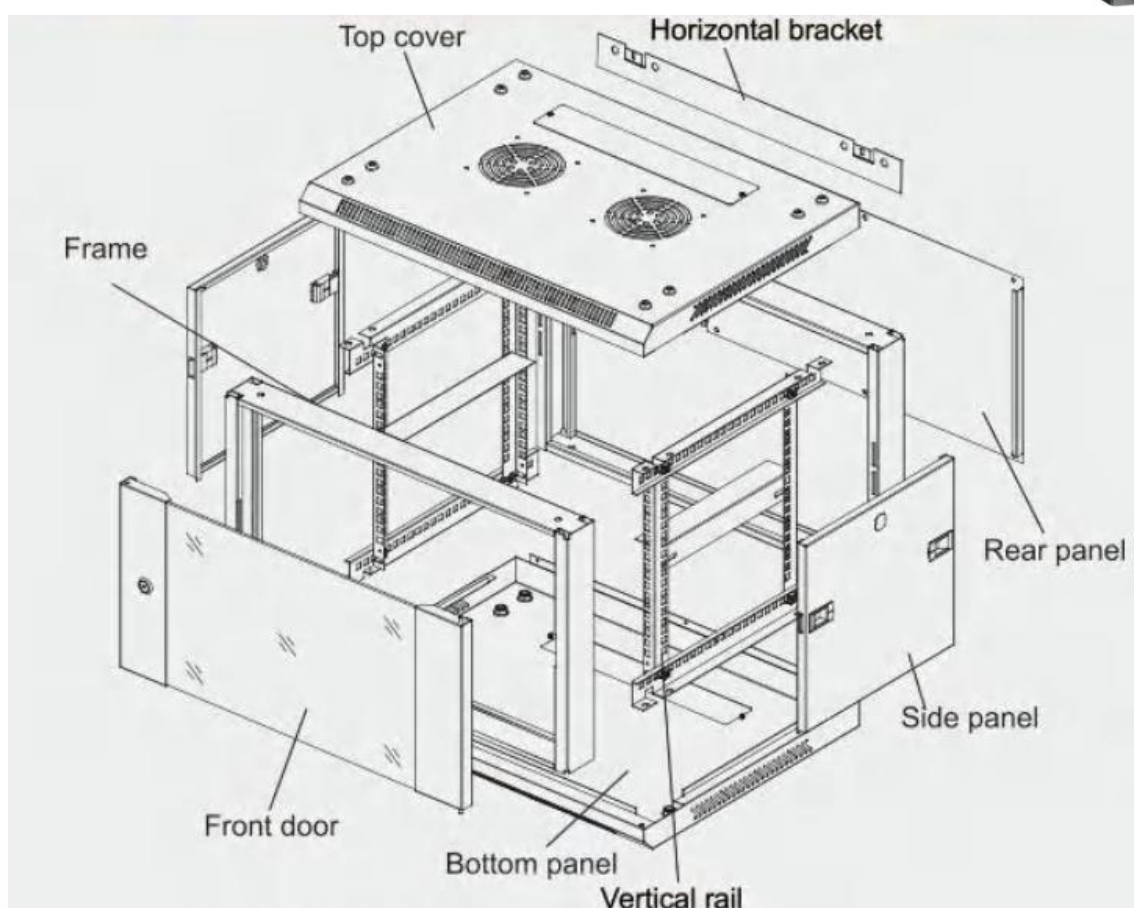

- Accessory
- Optional

| DS-XSPB04-S/B Standard tray for 600mm width cabinet | FD1238A2 Two-unit cabinet fan, European standard plug | DS-XPUK06-Y/KYL 6-ports 13A British standard PDU | DS-XPEUR08-Y/KYL 8-ports 16A European standard PDU |
|---|---|--|---|
|  |  |  |  |

See Far, Go Further



www.hikvision.com
support@hikvision.com

