

FM-24



A 24" borderless and streamline design FHD display with superior dynamic contrast ratio 100,000,000:1 for home and office multimedia applications.

AG Neovo FM-24 LED backlight display features a 1.5mm bezel width slim and lightweight design. The Full HD 1920 x 1080 resolution, incredibly high dynamic contrast ratio and PLS panel enable FM-24 to present vivid images from all viewing angles. With the built-in speakers, dual PC and HDMI input connectors makes FM-24 the excellent multimedia display for home and working environments.

- > 24" wide screen LED-backlit display
- > Available in white and black*
- > PLS panel provides consistent and accurate colour from all viewing angles
- > 1920 x 1080 Full HD resolution
- > 1.5 mm borderless design for an invitingly modern appeal
- > Superior colour performance and colour contrast
- > HDMI input for Full HD connectivity with multi-media devices
- > Built-in speakers (2W x 2)
- > High intensity stand and base with skid proof design
- > Tilt capacity from -5° to 15°
- > Kensington® Security socket


* Black version is available on request.

FM-24

Specifications

FM-24


Panel	Panel Type	LED-Backlit TFT LCD (PLS Panel)
	Panel Size	23.6"
	Max. Resolution	FHD 1920 x 1080
	Pixel Pitch	0.272 x 0.272
	Brightness	250cd/m ² (Typical)
	Contrast Ratio	100,000,000:1 (DCR)
	Surface Treatments	Anti-glare treatment
	Viewing Angle (H/V)	178°/178°
	Display Colour	16.7M
	Response Time	5ms (GTG)
Frequency (H/V)	H.Freq	30kHz – 81kHz
	V.Freq	56Hz – 75Hz
Input	VGA	15-Pin D-Sub
	HDMI	HDMI
Audio	Audio In	1 x stereo audio in for PC (audio jack, 3.5 Ø)
	Speaker	2W x 2
Power	Power Supply	DC 19V/2A
	Power Requirements	100 – 240 V, 50-60 Hz
	Consumption	< 30W (On) < 0.5W (Stand-by) < 0.5W (Off)
Operating Conditions	Temperature	5°C ~ 35°C (41°F ~ 95°F)
	Humidity	20% ~ 85%
Stand	Tilt Capacity	-5° ~ 15°
Dimensions	with Base (W x H x D)	535 x 402 x 198 mm (21.1" x 15.8" x 7.8")
	Packaging (W x H x D)	603 x 490 x 111 mm (23.7" x 19.3" x 4.4")
Weight	Product Weight (with base)	3.1 kg (6.8 lbs)
	Packaging Weight	4.6 kg (10.1 lbs)
Regulation Approval	Certifications & Compliance	CE, REACH, WEEE, RoHS
Accessories	Supplied	CD ROM (user manual), power cord, power adaptor, 15-Pin D-Sub cable, audio cable

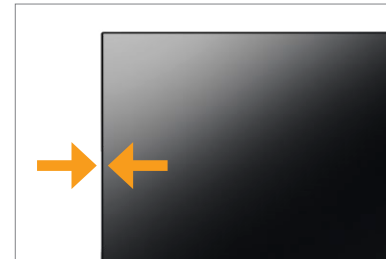

1.5 mm borderless design for an invitingly modern appeal



Built-in HDMI input makes the FM-24 easy to be paired with Full HD multimedia devices

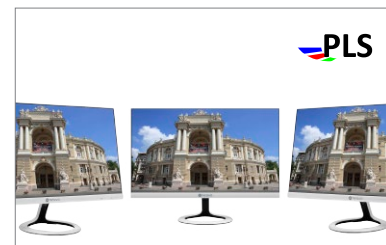

PLS panel provides superior clarity from all angles



User-friendly designed stand allows to tilt from -5° ~ 15°