



2 Megapixel Full HD CMOS Box Ex-SDI Camera ICR WDR

- Ex-SDI mode to increase transmission distance
- Full HD, 1920 x 1080p, up to 50/60 fps over coax
- WDR (Wide Dynamic Range) for extreme backlight situations
- Video Enhancement: BLC, HLC, DNR
- Built-in Service Monitor Port & OSD Control Port
- Power Input AC24V/DC12V



DIMENSIONS (mm)

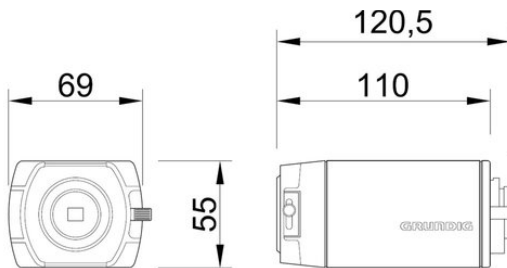


Image Sensor:	1/3" CMOS Sony Exmor 2 Megapixel
Pixels - Total:	1952(H) x 1116(V)
Pixels - Effective:	1944(H) x 1104(V)
Scanning System:	Progressive
Image Size:	1920x1080, 1280x720
Frame Rate:	30/60, 25/50 fps at 1080p; 30/60, 25/50 fps at 720p
Compliant:	SMPTE-292, Ex-SDI
Sensitivity Colour:	0.5 Lux @ F1.2 (IRE50)
Sensitivity B/W:	0.1 Lux@F1.2 (IRE50)
Sens up:	Off ~ x32, auto
S/N Ratio:	>50 dB
Shutter Speed:	AUTO, FLK, Manual 1/25 ~ 1/30,000
Col/B:	On/Off/Auto/Ext, IR-cut filter removable (ICR)
Lens Drive Type:	DC Auto Iris
OSD:	English
Camera ID:	Off / On, 8 character
Flip/Mirror:	On/Off
Gamma correction:	0.45 / 0.55 / 0.65 / 0.75
WDR:	Off/Low/Middle/High
Number of Privacy Zones:	16 (standard method) + 8 (polygonal method)
BLC Back Light:	BLC, HSBLC, OFF
Digital Noise Reduction (DNR):	Off/Low/Mid/High (Adaptive 3D + 2D)
Motion Detection:	On/ Off/ Sensitivity/ Area setting
Sharpness:	Off / On (1~20)
Digital Zoom:	Off/1 ~ 16x
White Balance:	ATW, AWB, AWC, Manual
De-Fog:	Off/Auto/Low/Middle/High
Presets:	Indoor, Outdoor, Lowlight, Hallway, Lobby, Elevator
Video Outputs:	1 Ch HD-SDI BNC or 1 Ch Composite BNC
Operating Temperature:	-10°C ~ +50°C
Storage Temperature:	-20°C ~ +60°C
Humidity:	less than 85%
Supply Voltage:	24 Vac / 12 Vdc
Dimensions (W x H x D):	69 x 55 x 120.5 mm - 2.72 x 2.17 x 4.74 In:
Power Consumption (W):	3
Weight:	0.33 kg - 0.73 lbs