

HikCentral Professional

HikCentral Professional is a flexible, scalable, reliable and powerful central surveillance system. It can be delivered after pre-installed on a server.

HikCentral Professional provides central management, information sharing, convenient connection and multi-service cooperation. It is capable of adding devices for management, live view, storage and playback of video files, alarm linkage, access control, time and attendance, facial identification, and so on.



Key Feature

Live View and Playback

- Up to 256 channels live view simultaneously
- Custom window division configurable
- Viewing maps and real-time events during live view and playback
- Adding tags during playback and playing tagged video
- Transcoded playback, frame- extracting playback, and stream type self-adaptive
- Fisheye Dewarping

Visual Tracking

Recording and Storage

- Recording schedule for continuous recording, event recording and command recording
- Storing videos on encoding devices, Hybrid SANs, cloud storage servers, pStors, or in pStor cluster service
- Providing main storage and auxiliary storage
- Providing video copy-back
- Storing alarm pictures on NVRs, Hybrid SANs, cloud storage servers, pStors, or HikCentral server

Event Management

- Camera linkage, alarm pop-up window and multiple linkage actions
- Multiple events for video surveillance, access control, resource group, resource maintenance, etc.

Person and Visitor Management

- Getting person information from added devices
- Provides multiple types of credentials, including card number, face, and fingerprint, for composite authentications
- Visitor registration and check-out

Access Control, Elevator Control, and Video Intercom

- Setting schedules for free access status and access forbidden status of doors or floors
- Supports multiple access modes for both card reader authentication and person authentication
- Setting access groups to relate persons, templates, and access points, which defines the access levels of different persons
- Supports advanced functions such as multi-factor authentication, anti-passback, and multi-door interlocking
- Controlling door or floor status in real-time
- Calling indoor station by the Control Client
- Calling the platform by door station and indoor station, and answering the call by the Control Client



Time and Attendance

- Setting different attendance rules for various scenarios, such as one-shift and man-hour shift
- Customizing overtime levels and setting corresponding work hour rate
- Supports flexible and quick settings of timetables and shift schedule
- Supports multiple types of reports according to different needs and sending reports to specified emails regularly
- Sending the original attendance data to a third-party database, thus the client can access third-party T&A and payment system

Supported Database Type	Version
Microsoft® SQL Server	2008 R2 and above
PostgreSQL	9.6.2 and above
MySQL	8.0.11 and above
Oracle	12.2.0.1 and above

Security Control

- Real-time alarm management for added security control panels
- Adding zone as hot spot on E-map and viewing the video of the linked camera
- Event and alarm linkage with added cameras, including pop-up live view, captured picture
- Subscribing the events that the Control Client can display in real-time
- Acknowledging the received alarm on the Control Client

Entrance and Exit Control

- Managing parking lot, entrances and exits, and lanes. Supports linking a LED screen with lane for information display
- Setting entry & exit rules for vehicles in the vehicle lists as well as vehicles not in any vehicle lists
- Entrance and exit control based on license plate recognition, card, or video intercom
- Viewing real-time and history vehicle information and controlling barrier gate manually on the Control Client

Temperature Screening

- Displaying the skin-temperature and whether wearing a mask or not about the recognized persons in real time
- Triggering events and alarms when detects abnormal temperature and no mask worn
- Viewing reports about skin-surface temperature and mask-wearing

Face and Body Recognition

- Displaying the information of the recognized persons in real-time
- Searching history records of recognized persons, including searching in captured pictures, searching matched persons, searching by features of persons, and searching frequently appeared persons

Intelligent Analysis

- Supports setting resource groups and analyzing data by different groups
- Supports intelligent analysis reports including people counting, people density analysis, queue analysis, heat analysis, pathway analysis, person feature analysis, temperature analysis, and vehicle analysis
- Display the number of people in specified regions in real-time

Network Management

- Managing network transmission devices such as switches, displaying the network connection and hierarchical relationship of the managed resources by a topology
- Viewing the network details between the device nodes in the topology, such as downstream and upstream rate, port information, etc. and checking the connection path
- Exporting the topology and abnormal data to check the device connection status and health status

Software Specification

The following table shows the maximum performance of the HikCentral Professional server. For other detailed data and performance, refer to *Software Requirements & Hardware Performance*.

Features		Maximum Performance
Devices and Resources	Cameras	Centralized Deployment: 3,000 ^① Distributed Deployment: 10,000 ^② Central System (RSM): 100,000 ^③
	Managed Device IP Addresses <i>*Including Encoding Devices, Access Control Devices, Elevator Control Devices, Security Control Devices, and Remote Sites</i>	Centralized Deployment: 1,024 ^① Distributed Deployment: 2,048 ^②
	Video Intercom Devices	1,024
	Alarm Inputs (Including Zones of Security Control Devices)	3,000
	Alarm Outputs	3,000
	Dock Stations	1,500
	Security Radars and Radar PTZ Cameras	30
	Alarm Inputs of Security Control Devices	2,048
	DS-5600 Series Face Recognition Terminals When Applied with Hikvision Turnstiles	32
	Recording Servers	64
	Streaming Servers	64
	Security Audit Server	8
	DeepinMind Server	64
	ANPR Cameras	3,000
	People Counting Cameras	Recommended: 300
	Heat Map Cameras	Recommended: 70
	Thermal Cameras	Recommended: 20 ^④
	Queue Management Cameras	Recommended: 300
	Areas	3,000
	Cameras per Area	256
	Alarm Inputs per Area	256
	Alarm Outputs per Area	256
Resource Groups	1,000	
Resources in One Resource Group	64	
Recording	Recording Schedule	10,000
	Recording Schedule Template	200
Event & Alarm	Event and Alarm Rules	Centralized Deployment: 3,000 Distributed Deployment: 10,000 Central System (RSM): 10,000
	Storage of Events or Alarms without Pictures	Centralized Deployment: 100/s Distributed Deployment: 1000/s
	Events or Alarms Sent to Clients <i>*The clients include Control Clients and Mobile Clients.</i>	120/s 100 Clients/s
	Notification Schedule Templates	200
Picture	Picture Storage <i>*Including event/alarm pictures, face pictures, and vehicle pictures.</i>	20/s (Stored in SYS Server) 120/s (Stored in Recording Server)
Reports	Regular Report Rules	100
	Event or Alarm Rules in One Event/Alarm Report Rule	32
	Records in One Sent Report	10,000 or 10 MB
	Resources Selected in One Report <i>*With this limitation, you can generate a neat and clear report via the Control Client and it costs less time.</i>	20
Data Storage	Data Retention Period	Stored for 3 Years

	People Counting	5 million
	Heat Map	0.25 million
	ANPR	60 million
	Events	60 million
	Alarms	60 million
	Access Records	1.4 billion
	Attendance Records	55 million
	Visitor Records	10 million
	Operation Logs	5 million
	Service Information Logs	5 million
	Service Error Logs	5 million
	Recording Tags	60 million
	Users and Roles	Concurrent Accesses via Web Clients, Control Clients, and OpenAPI Clients
Concurrent Accesses via Mobile Clients and OpenAPI Clients		100
Users		3,000
Roles		3,000
Vehicle (ANPR)	Vehicle Lists	100
	Vehicles per Vehicle List	5,000
	Under Vehicle Surveillance Systems	4
	Vehicle Undercarriage Pictures	3,000
Entrance & Exit	Lanes	8
	Cards Linked with Vehicles	250,000
	Vehicle Passing Frequency in Each Lane	1 Vehicle/s
Face Comparison	Persons with Profiles for Face Comparison	1,000,000
	Face Comparison Groups	64
	Persons in One Face Comparison Group	1,000,000
Access Control	Persons with Credentials for Access Control	50,000
	Visitors	10,000
	Total Credentials (Card + Fingerprint)	250,000
	Cards	250,000
	Fingerprints	200,000
	Profiles	50,000
	Access Points (Doors + Floors)	1,024
	Access Groups	512
	Persons in One Access Group	50,000
	Access Levels	512
Access Schedules	32	
Time and Attendance	Persons for Time and Attendance	10,000
	Attendance Groups	256
	Persons in One Attendance Group	10,000
	Shift Schedules	128
	Major Leave Types	64
	Minor Leave Types of One Major Type	128
Smart Wall	Decoding Devices	32
	Smart Walls	32
	Views	1,000
	View Groups	100
	Views in One View Group	10
	Cameras in One View	150
	Views Auto-Switched Simultaneously	32
Streaming Server's Maximum Performance		
Video Input Bandwidth per Streaming Server		300 × 2 Mbps
Video Output Bandwidth per Streaming Server		300 × 2 Mbps

①: For one site, the maximum number of the added encoding devices, access control devices, security control devices, and video intercom devices in total is 1,024. If the number of the manageable cameras (including the cameras directly added to the site and the cameras connected to these added devices) exceeds 3,000, the exceeded cameras cannot be imported to the areas.

②: For one site with Application Data Server deployed independently, the maximum number of the added encoding devices, access control devices, and security control devices in total is 2,048. If the number of the manageable cameras (including the cameras directly added to the system and the cameras connected to these added devices) exceeds 10,000, the exceeded cameras cannot be imported to the areas.

③: For one site, if the number of the manageable cameras (including the cameras managed on the current site and the cameras from the Remote Sites) in the Central System exceeds 100,000, the exceeded cameras cannot be managed in the Central System.

④: This recommended value refers to the number of thermal cameras connected to the system directly. It depends on the maximum performance (data processing and storage) in the situation when the managed thermal cameras uploading temperature data to the system. For thermal cameras connected to the system via NVR, there is no such limitation.

Hardware Specification




Processor	Intel® Xeon® E-2124	
Memory	16G DDR4 DIMM slots, Supports UDIMM, up to 2666MT/s, 64GB Max. Supports registered ECC	
Storage Controllers	Internal Controllers: SAS_H330 Software RAID: PERC S140 External HBAs: 12Gbps SAS HBA (non-RAID) Boot Optimized Storage Subsystem: 2x M.2 240GB (RAID 1 or No RAID), 1x M.2 240GB (No RAID Only)	
Drive Bays	1T 7.2K SATA×2	
Power Supplies	Single 250W (Bronze) power supply	
Dimensions	Form Factor: Rack (1U) Chassis Width: 434.00mm (17.08 in) Chassis Depth: 595.63mm (23.45 in) (3.5" HDD) Note: These dimensions do not include: bezel, redundant PSU	
Dimensions with Package (W × D × H)	750 mm × 614 mm × 259 mm (29.53" × 24.17" × 10.2")	
Net Weight	12.2kg	
Weight with Package	18.5kg	
Embedded NIC	2 x 1GbE LOM Network Interface Controller (NIC) ports	
Device Access	Front Ports: 1x USB 2.0, 1 x iDRAC micro USB 2.0 management port Rear Ports: 2 x USB 3.0, VGA, serial connector	
Embedded Management	iDRAC9 with Lifecycle Controller iDRAC Direct DRAC RESTful API with Redfish	
Integrations and Connections	Integrations: Microsoft® System Center VMware® vCenter™ BMC Truesight (available from BMC) Red Hat Ansible	Connections: Nagios Core & Nagios XI Micro Focus Operations Manager i (OMi) IBM Tivoli Netcool/OMNIBus
Operating Systems	Microsoft Windows Server® with Hyper-V	

System Requirement

* For high stability and good performance, the following system requirements must be met.

Feature	Description
OS for HikCentral Professional Server	Microsoft® Windows 7 SP1 (64-bit) Microsoft® Windows 8.1 (64-bit) Microsoft® Windows 10 (64-bit) Microsoft® Windows Server 2008 R2 SP1 (64-bit) Microsoft® Windows Server 2012 (64-bit) Microsoft® Windows Server 2012 R2 (64-bit) Microsoft® Windows Server 2016 (64-bit) Microsoft® Windows Server 2019 (64-bit) <i>*For Windows 8.1 and Windows Server 2012 R2, make sure it is installed with the rollup (KB2919355) updated in April, 2014.</i>
OS for Control Client	Microsoft® Windows 7 SP1 (32/64-bit) Microsoft® Windows 8.1 (32/64-bit) Microsoft® Windows 10 (64-bit) Microsoft® Windows Server 2008 R2 SP1 (64-bit) Microsoft® Windows Server 2012 (64-bit) Microsoft® Windows Server 2012 R2 (64-bit) Microsoft® Windows Server 2016 (64-bit) Microsoft® Windows Server 2019 (64-bit) <i>*For Windows 8.1 and Windows Server 2012 R2, make sure it is installed with the rollup (KB2919355) updated in April, 2014.</i>
OS for Visitor Terminal	Android 7.1 and later
Browser Version	Internet Explorer 10/11 and above Chrome 61 and above Firefox 57 and above Safari 11 and above (running on Mac OS X 10.3/10.4)
Database	PostgreSQL V9.6.13
OS for Smartphone	iOS 10.0 and later Android phone OS version 5.0 or later, and dual-core CPU with 1.5 GHz or above, and at least 2G RAM
OS for Tablet	iOS 10.0 and later Android tablet with Android OS version 5.0 and later
Virtual Machine	VMware® ESXi™ 6.x Microsoft® Hyper-V with Windows Server 2012/2012 R2/2016 (64-bit) <i>*The Streaming Server and Control Client cannot run on the virtual machine. *Virtual server migration is not supported.</i>

Typical Application

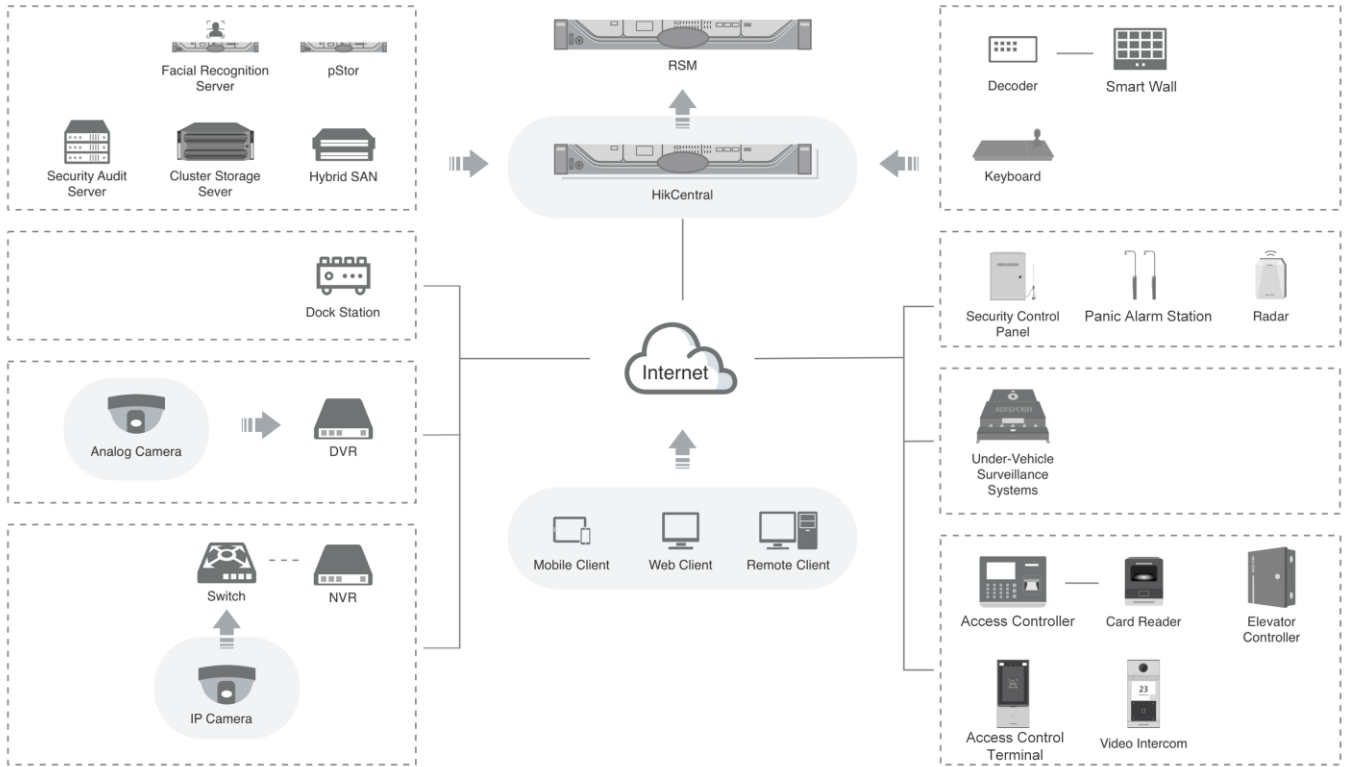

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
sateru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com