

DS-6716NXI-I/16S(B) Parking DeepinMind Parking Series NVS



Key Features


- Deep learning-based parking space detection function
- Configurable arming time of alarm input/output
- Audio alarm, notifying surveillance center, sending email and alarm output
- Supports multiple VCA (Video Content Analytics) events
- Easy network access via Hik-Connect
- Access via multi-browsers such as IE, Firefox, Chrome, Safari, etc.
- 2 Gigabit Ethernet network interfaces



Specifications

| | | |
|---------------------------|--|---|
| Model | | iDS-6716NXI-I/16S(B)/Parking |
| Parking | Parking Space Detection | Up to 4-ch 8 MP (H.264/H.265) video analysis for parking space detection; Up to 40 parking spaces for each channel. |
| Video/Audio output | VGA output | N/A |
| | HDMI output | N/A |
| | Audio output | 1-ch, RCA (Linear, 1 KΩ) |
| Video/Audio input | IP video input | 16-ch |
| | Incoming/Outgoing bandwidth | 320 Mbps/256 Mbps |
| Decoding | Encoding format | H.265/H.265+/H.264/H.264+/MPEG4 |
| | Live view/playback resolution | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF |
| | Synchronous playback | 16-ch |
| | Capability | 16-ch @ 1080p |
| Hard disk | Hard disk | 1, built-in 3.5-inch 2 TB SATA hard disk |
| External interface | Two-way audio | 1-ch, RCA (Linear, 1 KΩ) |
| | Network interface | 2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface |
| | Serial interface | RS-232; RS-485 |
| | USB interface | N/A |
| | Alarm in/out | 16/4 |
| General | Power supply | 12 VDC, 3.33 A |
| | Consumption (without hard disk) | ≤ 30 W |
| | Working temperature | -10 °C to 55 °C (14 °F to 131 °F) |
| | Working humidity | 10 to 90 % |
| | Dimensions (W × D × H) | 315 × 240.8 × 65 mm (12.4" × 9.5" × 2.6") |
| | Weight (without hard disk) | ≤ 3 kg (6.6 lb) |

Physical Interfaces

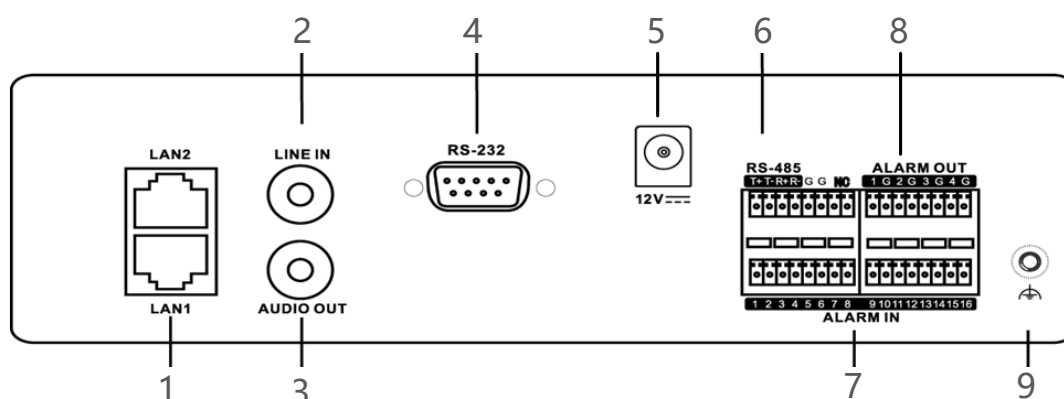

| Index | Description | Index | Description |
|-------|--------------------------|-------|------------------|
| 1 | LAN1 and LAN2 Interfaces | 6 | RS-485 Interface |
| 2 | LINE IN | 7 | Alarm In |
| 3 | AUDIO OUT VGA Interfaces | 8 | Alarm Out |
| 4 | RS-232 Interface | 9 | GND |
| 5 | 12 VDC Power Supply | | |

Available Models

iDS-6716NXI-I/16S(B)

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com