


**LIR-IC88**

**Weatherproof of IR Illuminator**

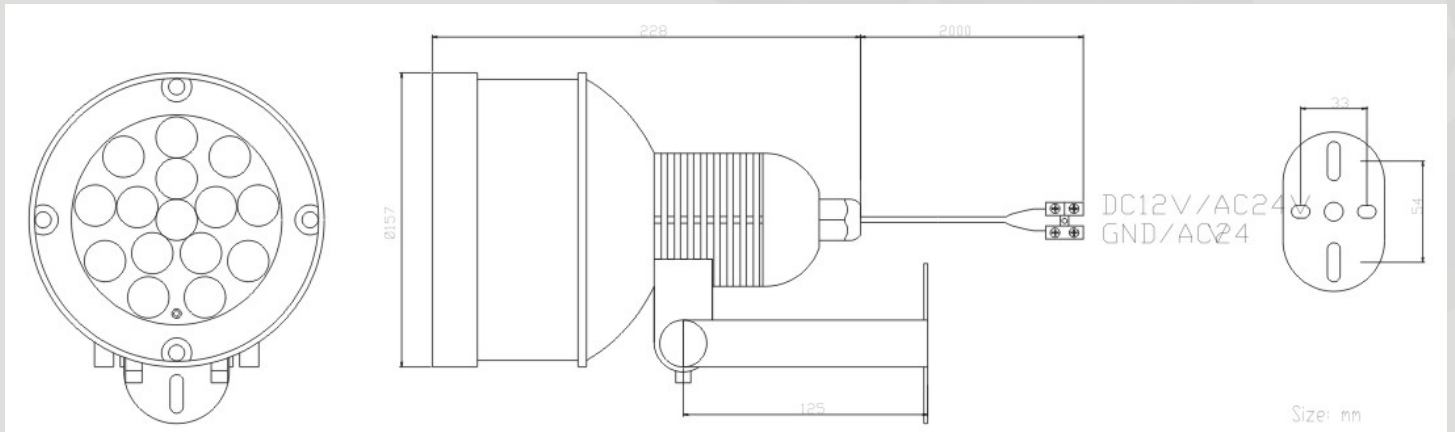

**● FEATURES**

- High efficiency cooling structure aluminium case
- Dual voltage (AC24V/DC12V)
- 15 PCs super high power IR LED
- Switch on/off automatically by photocell
- Available IR in (Outdoor): 180M, 40°

**Remark: Non-regulative adaptor may cause camera damaged.**

**● ACCESSORIES**

1. User manual.....X1
2. Screw.....X6
3. Plastic-Conical-Anchor.....X4
4. Hexagonal Wrench.....X1
5. Mounting drawing paper.....X1

**● SPECIFICATION**

Items	LIR-IC88
IP Rating	IP66 (Outdoor)
IR LED	15 PCs
Wave Length	850nm
IR Projecting Angle	40°
Emissive Power	15W
Available IR Distance	180M (590.16ft )
Control	CDS/10Lux
Power Supply	DC12V±10%/AC24V±10%
Current Consumption	DC1200mA /AC950mA
Dimension	∅ 157×228mm(0.51×0.75ft)
Weight	2330g
Storage Temperature	-30℃ ~+60℃
Operating Temperature	-30℃ ~+40℃
Package	4PCs/CTN 11.5KGS 620×210×470mm(2.03×0.69×1.54ft)

**● Package:**

Weight.....2330g  
 Dimension..... ∅ 157×228mm  
 Quantity per carton .....4PCs  
 Dimension of carton.....620×210×470mm  
 Weight of carton.....11.5KGs