


DS-2CE5582P(N) -IRP


600 TVL DIS Indoor IR Dome Camera

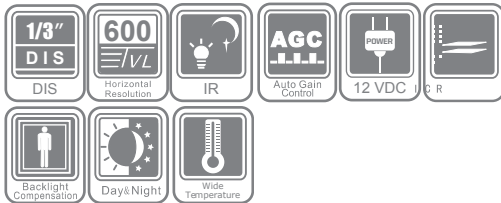

Key features

- 600 TVL Horizontal Resolution
- True Day/Night
- 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance
- Wide Operating Temperature Range:
-40°C to 60°C(-40°F to +140°F)

Dimensions

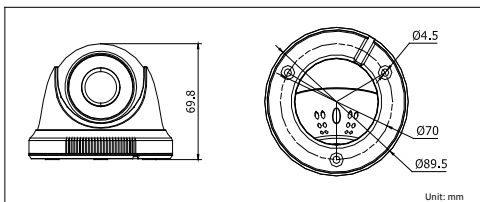

DS-2CE5582P(N)-IRP	
Camera	
Image Sensor	1/3" DIS
Signal System	PAL/NTSC
Effective Pixels	720 (H) × 480 (V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.37 Lux @ (F2.3, AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s
Lens	3.6 mm @ F2.3 (2.8mm, 6 mm optional) Angle of view: 70.6° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°; Tilt: 0 - 85°; Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	600 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 52 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 10%
Power Consumption	Max. 2 W (Max. 5 W with IR cut filter on)
IR Range	Approx. 10 to 20 meters
Dimensions	Φ89.5 × 69.8 mm (3.52" × 2.75")
Weight	200 g (0.44 lbs)

Available models

PAL: DS-2CE5582P-IRP
NTSC: DS-2CE5582N-IRP